



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.4000-8000Sf


16-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
4-8 GHz	0.4dB max	+/-5° max	1.4:1 max	1.7dB max	20dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: In = SMA female x 1, Out = SMA female x 16
- Power: 10W forward, 1W reverse
- Case material: Aluminum alloy with black paint
- Operation temperature: 55C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

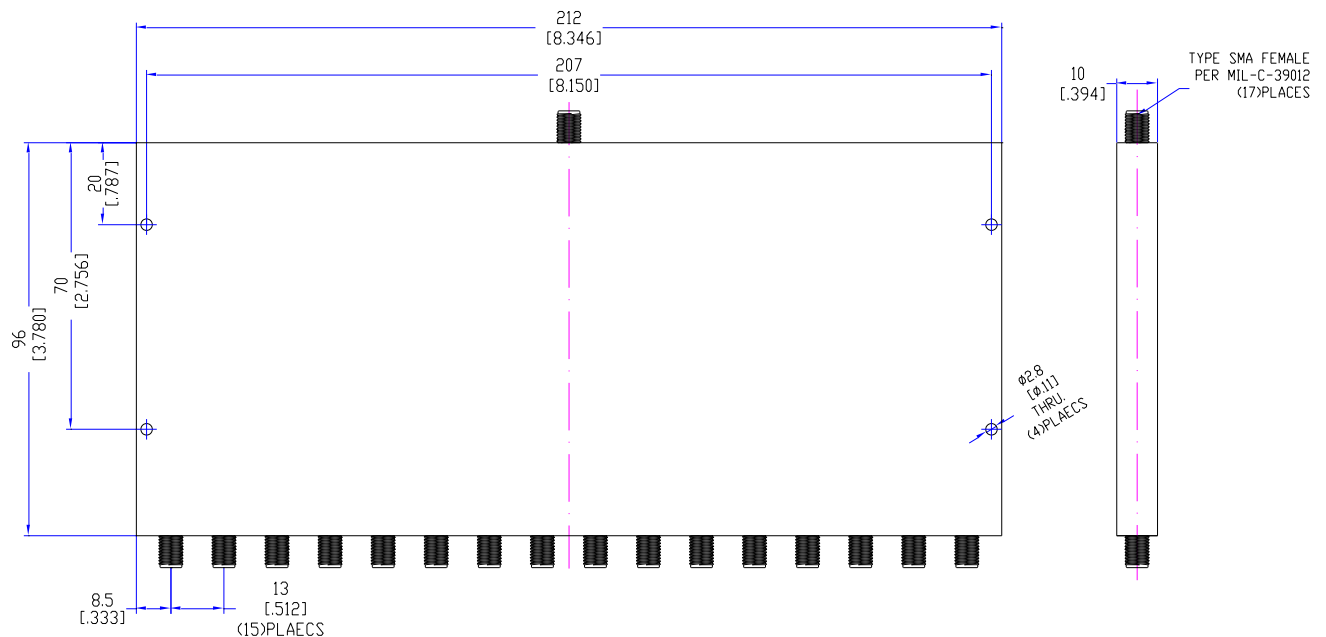

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com