



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.500-6000Sf


16-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5-6 GHz	0.8dB max	+/-8° max	1.80:1 max	3.8dB max	16dB min

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 17 places
- Power: Forward: 30W CW Reverse: 0.5W
- Case material: Aluminum alloy w/clear iridite
- Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

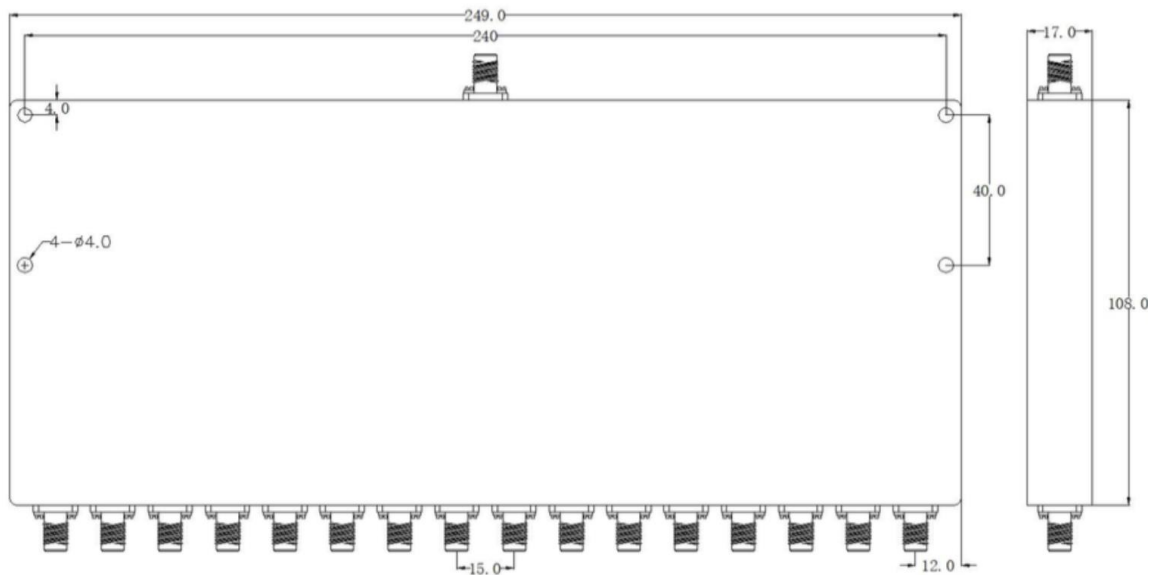

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com