94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.500-8000Sf — 16-Way, Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5 – 8GHz	1 dB max	+/-12º max	1.9:1 max	4 dB max	15dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 17 places
c. Power: Forward 25 W CW Reverse 1W CW
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -55°C to +85°C

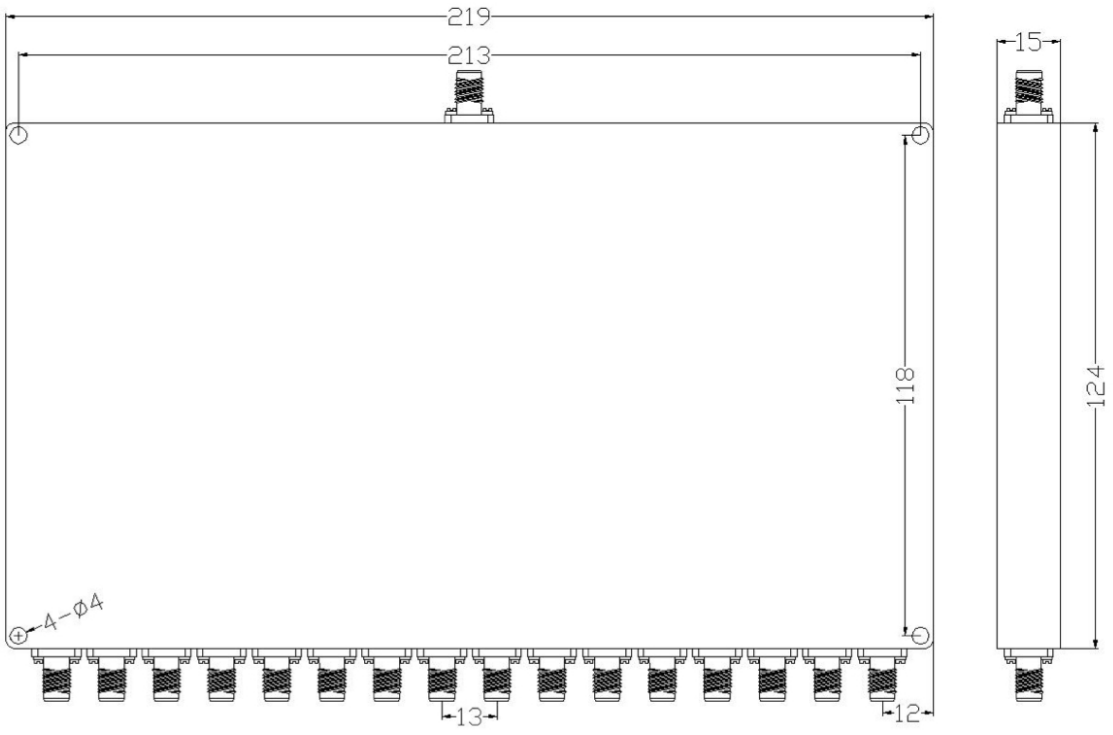

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com