94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.5000-6000Sf — 16-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
5–6 GHz	0.6dB max	+/-6° max	1.5:1 max	2dB max	18dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 17 places**
c. **Power: 30 W forward, 1W reverse**
d. **Case material: Aluminum alloy w/iridite finish**
e. **Operation temperature: -35°C to +85°C**

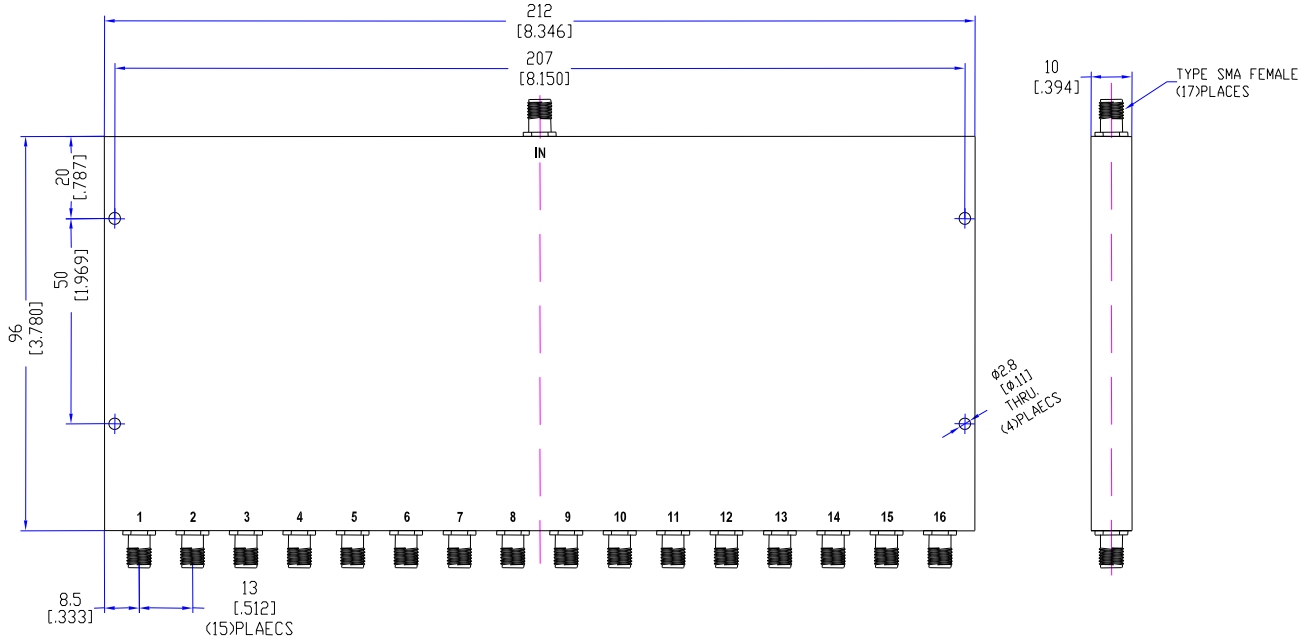

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 3/24/10