94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.650-2400Sfc — 16-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
650-2400MHz	0.6dB max	+/-10° max	1.5:1 max	1.8dB max	22dB min

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 17 places with no flange or lock nut**
c. **Power: 30 W forward, 3W reverse**
d. **Case material: Aluminum alloy w/clear iridite finish**
e. **Operation temperature: -35°C to +85°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

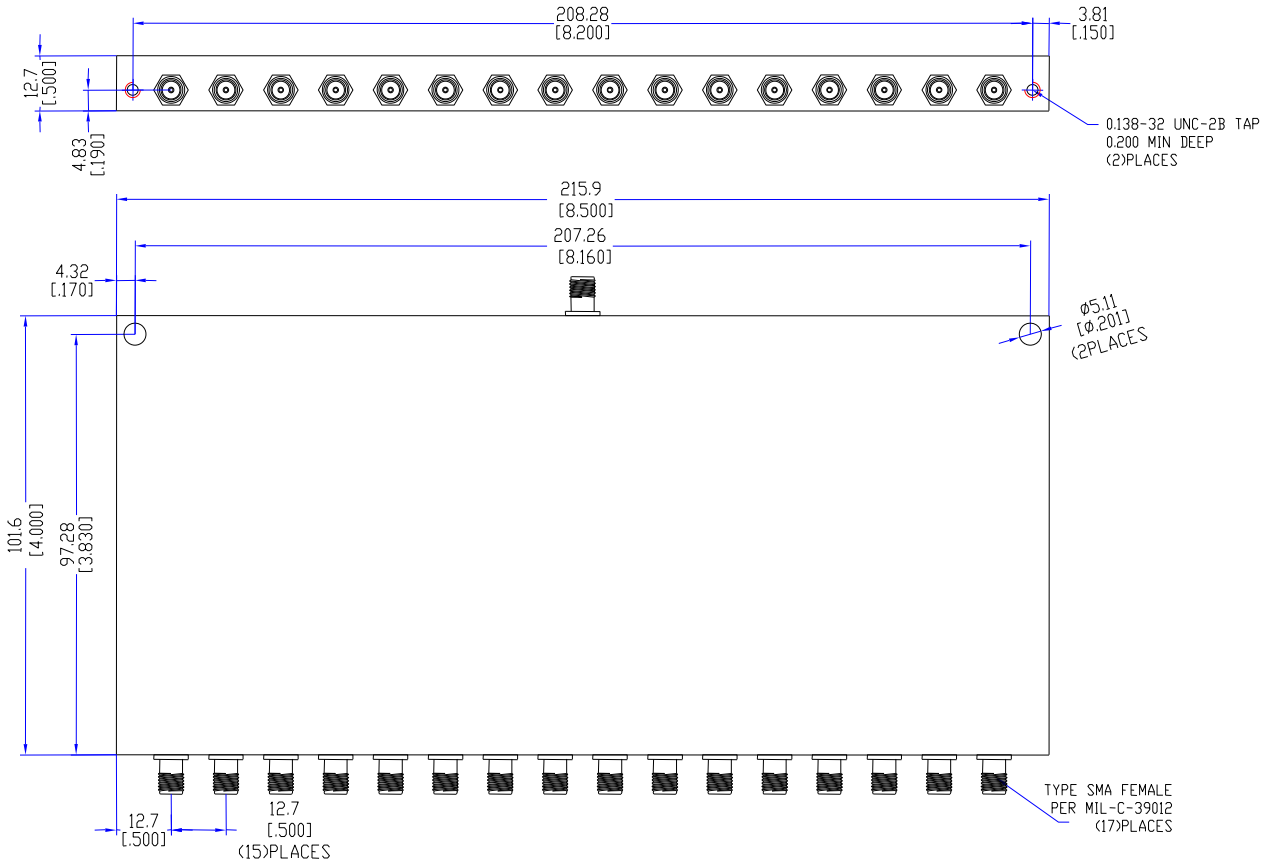

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 9/23/15