94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.0-1800Sf 2-Way Resistive, SMA Female

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance +/-	
				Phase º	Amp (dB)
	max	min	max		
DC-1.8	0.16	0	1.5:1	5	0.5

Notes:

a. Input and output impedance: 50Ω
b. Connectors: SMA Female 3 places
c. Power Handling: 2 Watt max forward/reverse
d. Housing Material: Aluminum Alloy w/black paint
e. Operation temperature: -55ºC to +85ºC

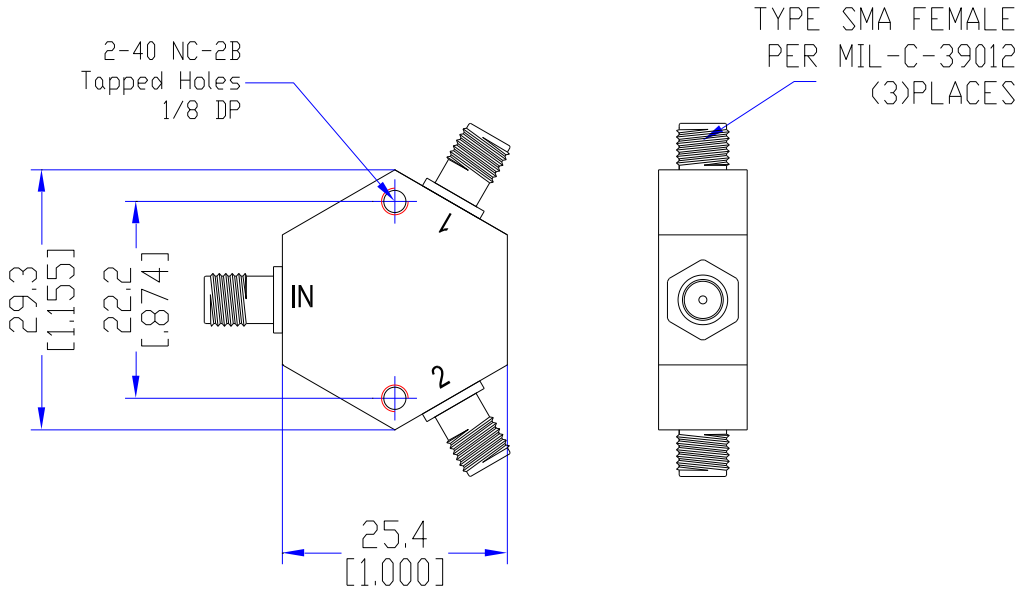

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com