94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.0-40.292f 2-Way, Resistive, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0–40GHz	0.6dB max	+/-5º max	2.5:1 max	1.5dB max	10dB min

Notes:

a. Input and output impedance: 50Ω
b. Input VSWR is 1.5:1 max
c. Connector: 2.92mm female 3 places, SS/P
d. Power: Forward 1W CW, Peak 10W
e. Case material: Aluminum alloy w/gold plate
f. Operation temperature: -40°C to +70°C

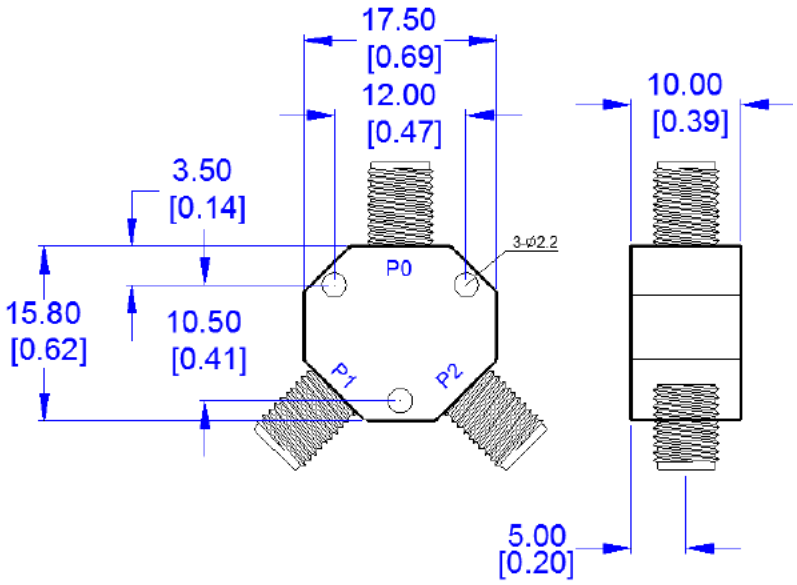

Dimensions in mm (inches) tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com