94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.0-40.292fa 2-Way, Resistive, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Power
0–40GHz	0.5dB max	+/-5º max	1.5:1 max	2.0dB max	0.1W max

Notes:

a. Input and output impedance: 50Ω
b. Connector: 2.92mm female 3 places, SS/P
c. Case material: Aluminum alloy w/black paint
d. Operation temperature: -55°C to +85°C

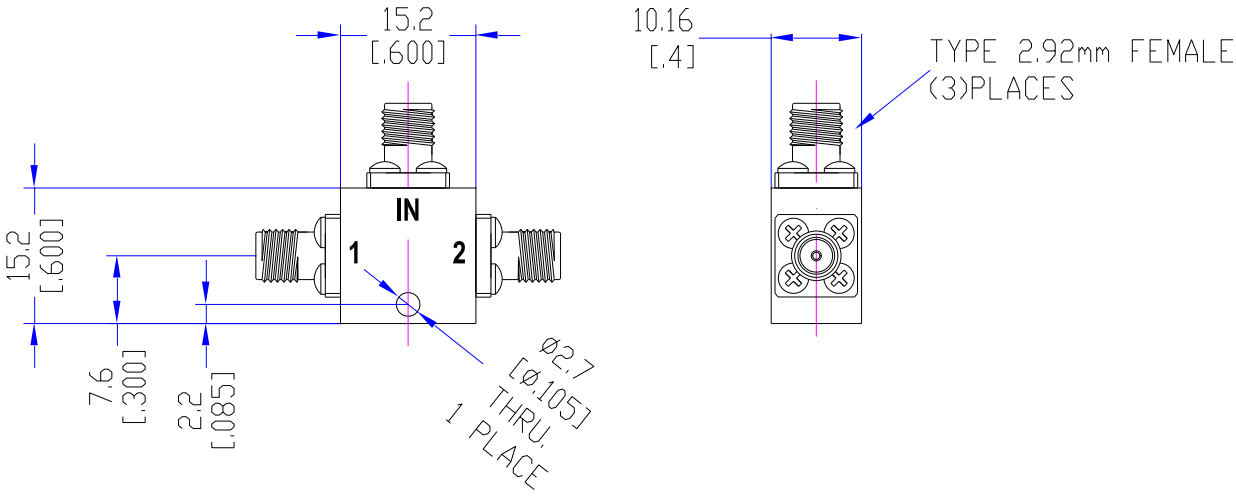

Dimensions in mm (inches) tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com