



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD2.05-40.292f

2-Way, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5–40GHz	0.5dB max	+/-6° max	1.6:1 max	3.5dB typ	16dB min

Notes:

- Input and output impedance: 50Ω
- Connector: 2.92mm female 3 places, SS/P
- Power: Forward 20W CW, Reverse 0.2W CW, Peak 3KW
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +125°C

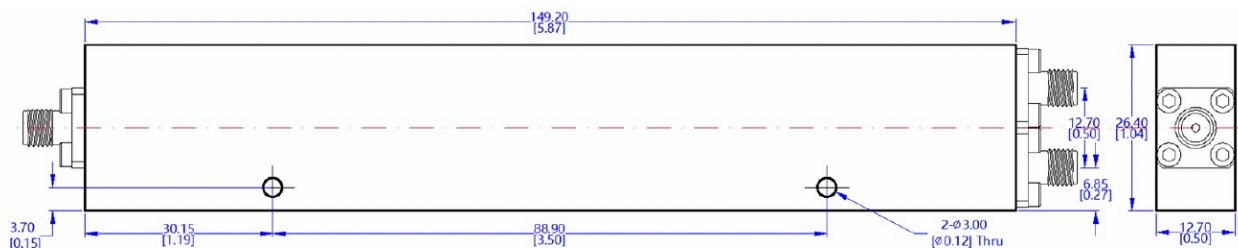

Unit : MM / [Inch] , Unless otherwise specified, Outline drawing ±0.2MM ; Hole±0.1MM

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com