94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.1-18Sfa 2-Way SMA Female

Electrical Specifications:

Frequency	Insertion Loss (max)	VSWR (max)	Phase	Amplitude	Isolation (min)
1-18GHz	1dB	1-1.5GHz 1.78:1 1.5-2GHz 1.67:1 2-18GHz 1.40:1	5°	0.2dB	12dB 1-2GHz 18dB 2-18GHz

Notes:

a. Input and output impedance: 50Ω
b. Connectors: SMA Female 3 places
c. Power Handling: ≤ 10 Watt max Input ≤1 Watt Output
d. Housing Material: Aluminum Alloy with black paint
e. Operation temperature: -55 ºC to +85ºC

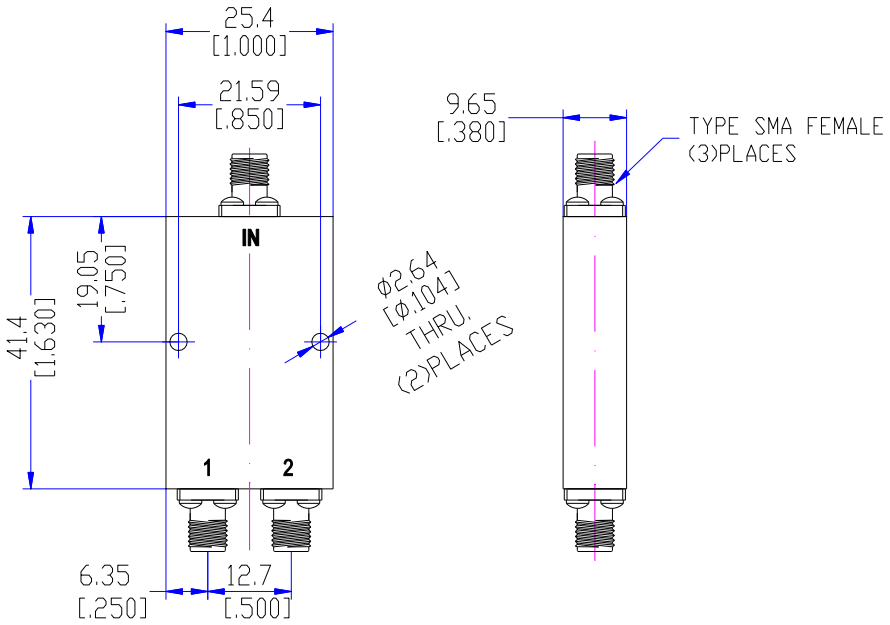

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com