94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.10-2000Sf 2-Way, SMA

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
10 – 2000MHz	1.0dB max	+/-8º max	1.5:1 typ	1.6dB typ	16dB typ

Notes:

- ***a. Input and output impedance: 50 Ω***
- ***b. Connector: SMA female 3 places***
- ***c. Power: 5 W max***
- ***d. Case material: Aluminum alloy w/iridite finish***
- ***e. Operation temperature: -35°C to +85°C***

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

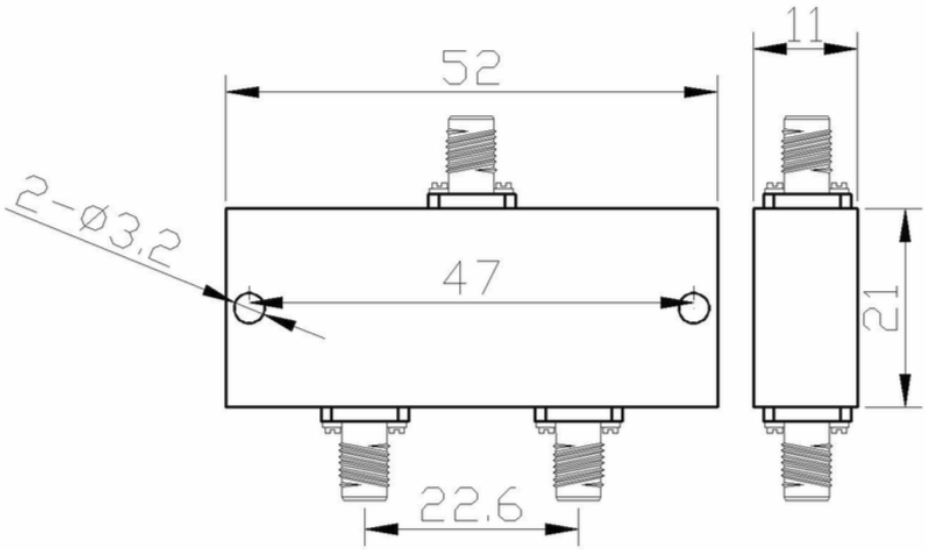

Dimensions in mm

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com