



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.10-2500Sf


2-Way, SMA

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
10 – 2500MHz	0.2dB typ	+/-2° max	1.4:1 typ	0.6dB typ	20dB typ

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places
- Forward Power: 50 W maximum
- Case material: Aluminum alloy w/iridite finish
- Operation temperature: -35C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

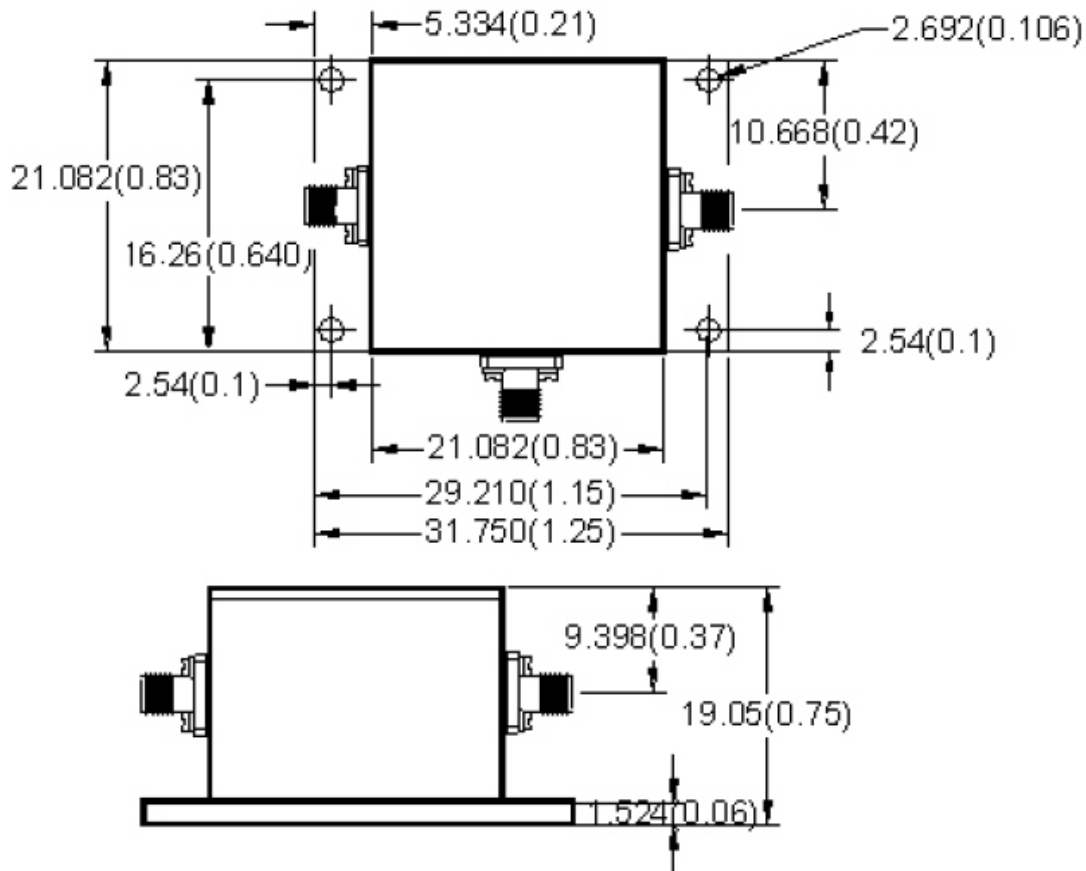

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com