1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider / Splitters

Model RMPD2-10000SF 2 way Power Divider SMA female

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
8000-10000MHz	0.4dB max	20dB min	1.25:1typ	3º max	0.3 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female
c. Power: 25w forward, ≤ 1 W reverse
d. Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
e. Operation temperature: -35C to +85C deg

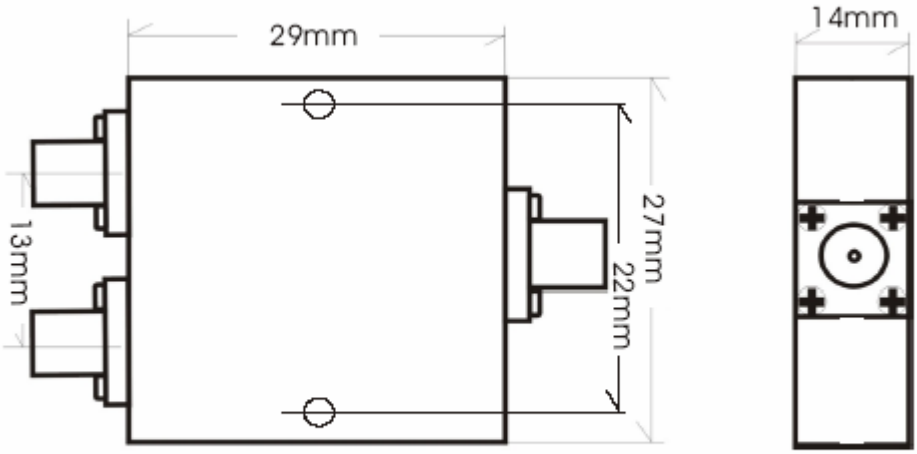

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05