94 JACKSON ROAD, STE 110, DEVENS, MA 01434

Power Divider / Splitters

Model RMPD2.17-22Smf — 2-way, SMA male/female

Frequency	Insertion Loss	Isolation	Phase Unbalance	Amplitude Unbalance	VSWR
17-22GHz	1.2dB max	18dB min	+/-4° max	+/-0.4dB max	1.5:1max

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA male input/female output**
c. **Average Power: ≤ 10 W, 3Kw Peak**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -55°C to +85°C**

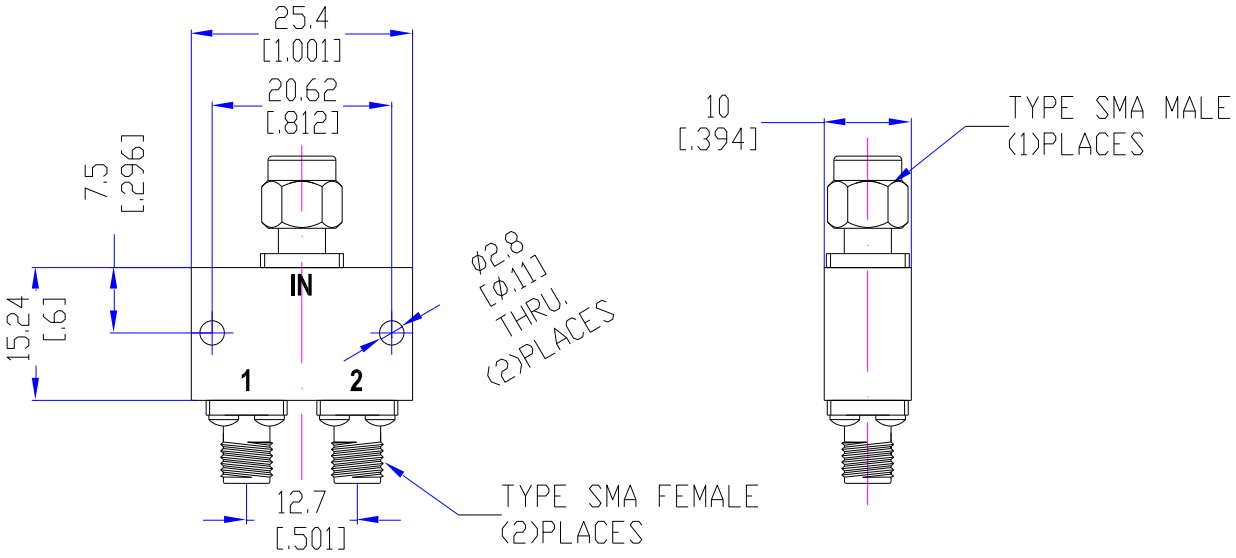

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978.772.3768**

www.responsemicrowave.com

Rev 4/21/23