94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.2-18Sf Female

2-Way Power Divider SMA

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance	
				Phase °	Amp (dB)
	typ/max	typ/min	typ/max		
2 – 18	0.8/1.8	20/15	1.5:1/1.8:1	5	0.5

Notes:

a. Input and output impedance: 50 Ohms
b. Connectors: SMA Female 3 places
c. Power Handling: ≤ 25 Watt max Input ≤1.0 Watt Output
d. Housing Material: Aluminum Alloy with paint
e. Operation temperature: -35 ºC to +80ºC deg

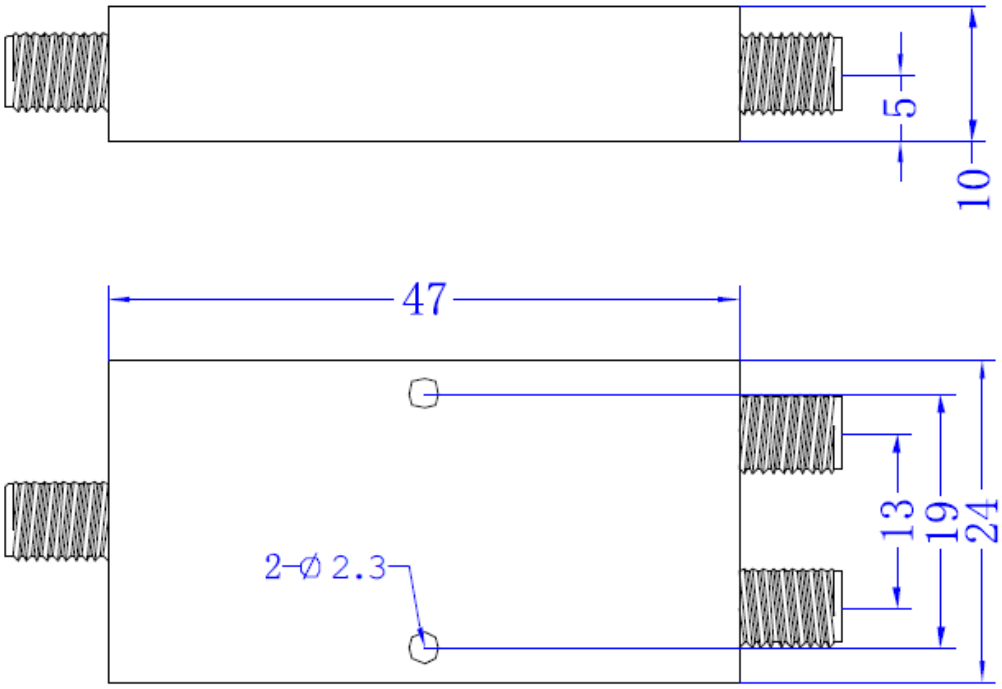

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com