94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.2-18Sfc 2-Way Power Divider SMA Female

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance	
				Phase °	Amp (dB)
	max	min	max		
2 – 18	0.7	18	1.2:1	5	0.4

Notes:

a. Input and output impedance: 50 Ohms
b. Connectors: SMA Female 3 places
c. Power Handling: Forward ≤ 20 Watt max, Reverse ≤0.5 Watt Output
d. Housing Material: Aluminum Alloy with black paint
e. Operation temperature: -35 ºC to +80ºC deg

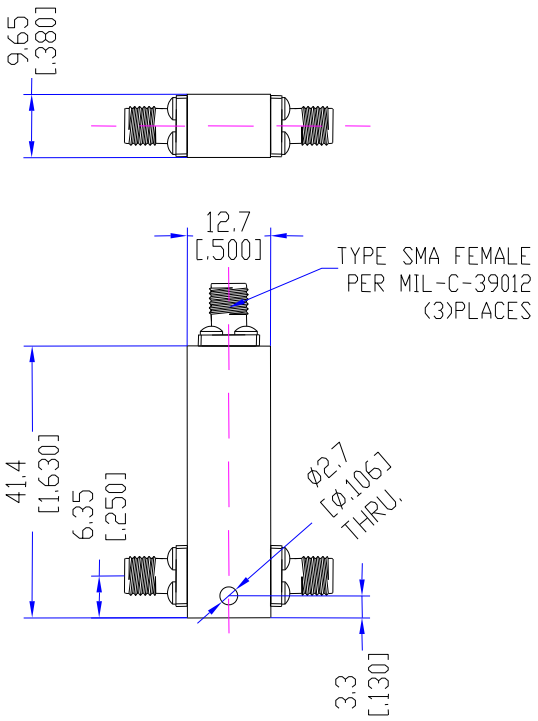

All specifications are subject to change without notice.