



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD2.2-26Sf

2-Way, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
2–26GHz	0.3dB max	+/-3° max	1.7:1 max	1.2dB typ	20dB min

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places, SS/P
- Power: Forward 40W CW Reverse 0.2W CW
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +125°C

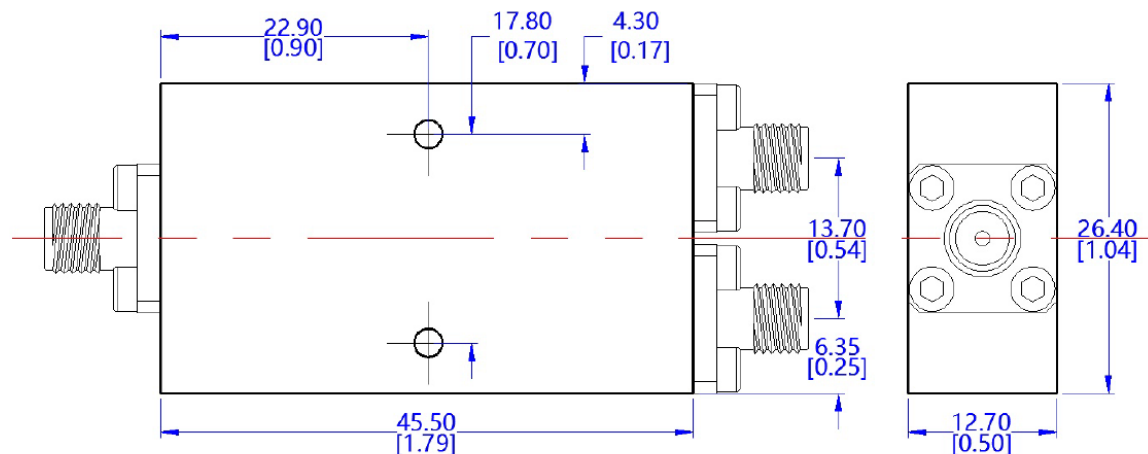

Unit : MM / [Inch] , Unless otherwise specified, Outline drawing $\pm 0.2\text{MM}$; Hole $\pm 0.1\text{MM}$

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com