94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.2-8Sfb 2-Way, SMA Female

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance	
				Phase º	Amp (dB)
	max	min	max		
2 – 8	0.6	20	1.30:1	2	0.2

Notes:

a. Input and output impedance: 50 Ω
b. Connectors: SMA Female 3 places
c. Power Handling: ≤ 30 Watt max Input ≤1 Watt Output
d. Housing Material: Aluminum Alloy with black paint
e. Operation temperature: -35 ºC to +80ºC

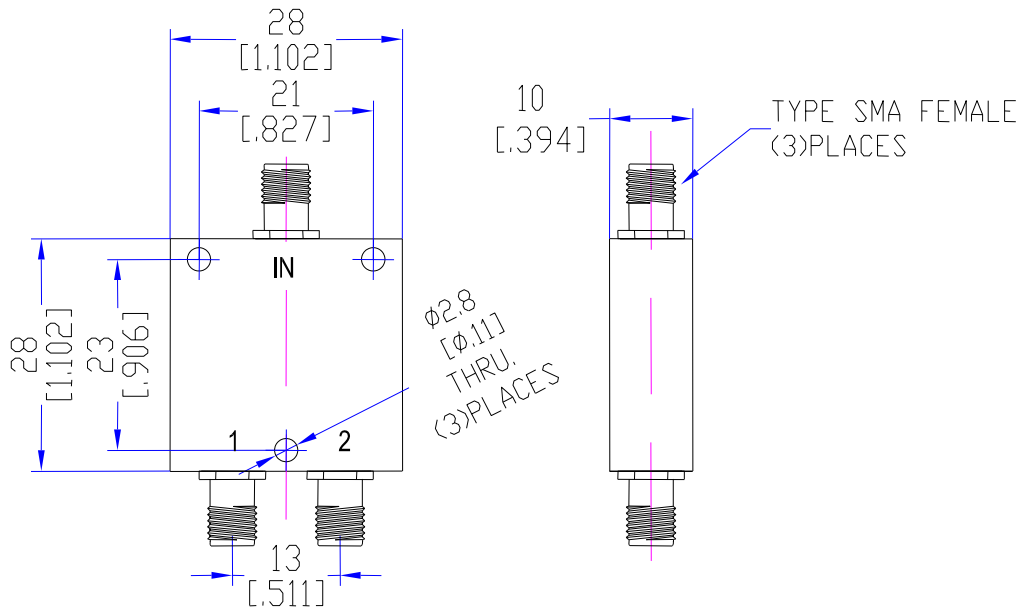

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com