94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.2000-10000Sfa — 2-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
2 – 10GHz	0.6dB max	+/- 6º max	1.60:1 max	0.8dBmax	18dB min

Notes:

a. Input and output impedance: 50 Ω
b. Connector: SMA female, 3 places
c. Housing base metal in compliance with DFARS 252.225.7009
d. Power: Forward 20 W CW Reverse: 1 W
e. Case material: Aluminum alloy w/alodine finish
f. Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

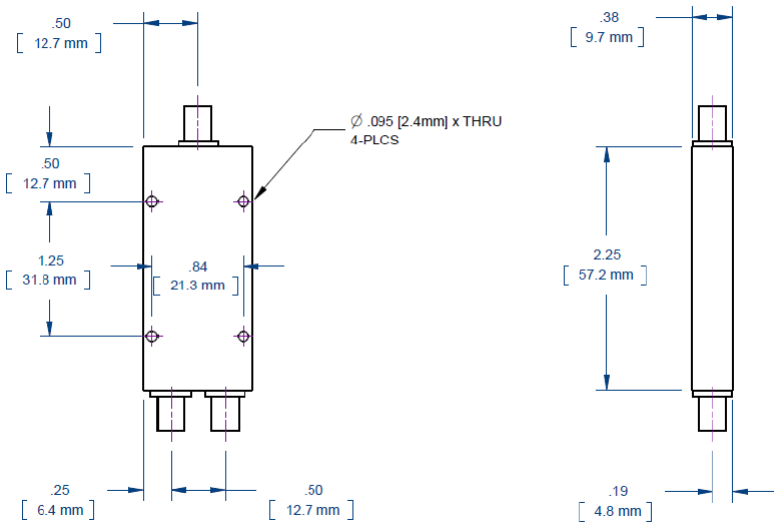

Dimensions in inches (mm). All specifications are subject to change

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com