1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider / Splitters

Model RMPD2-2200NF

2-way Power Divider N female

Freq. Range (Mhz) F_L-F_U	Insertion Loss(dB)	Isolation (dB)	VSWR	Unbalance	
				Phase (Deg)	Amplitude(dB)
	Max	Min	Max	Max	Max
1800-2200	0.3	20	1.25	2	0.2

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: N female (options: SMA, BNC, TNC & Reverse Polarity versions)**
c. **Output Power: ≤ 50 W**
d. **Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.**
e. **Operation temperature: -35C to +85C deg**

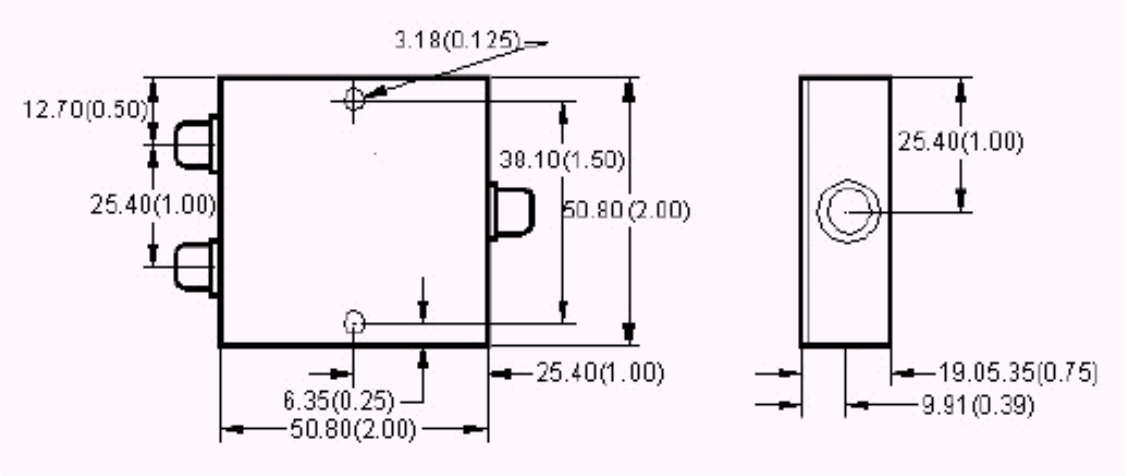

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05