94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD2.3400-4200Sfm 2-Way, SMA male/female

| Frequency | Amplitude Balance | Phase Balance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 3.4-4.2GHz | 0.2dB max | +/- 2º max | 1.25:1 max | 0.5dBmax | 20dB min |

**Notes:**

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female, 2 places, SMA male 1 place**
c. **Power: Forward 30 W CW Reverse: 1 W**
d. **Case material: Aluminum alloy black paint**
e. **Operation temperature: -55°C to +85°C**
f. **RoHS Compliant**

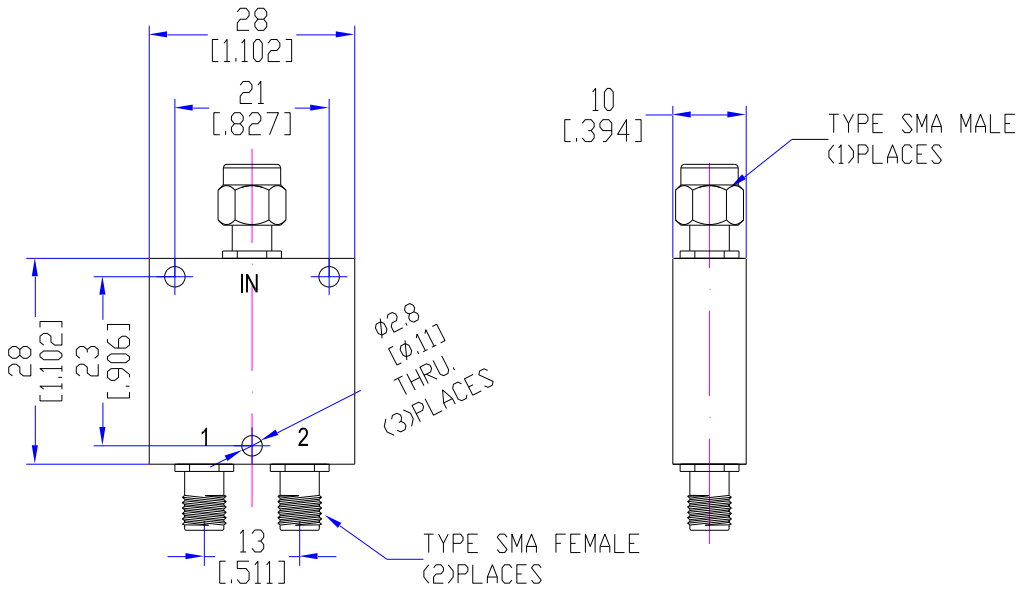


*Dimensions in mm (inches). All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com