94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.3400-4800Sfm 2-Way, SMA male/female

Frequency	Amplitude Balance	Phase Balance	VSWR	Insertion Loss	Isolation
3.4-4.8GHz	0.2dB max	+/- 2° max	1.3:1 max	0.6dBmax	20dB min

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female, 2 places, SMA male 1 place**
c. **Power: Forward 30 W CW Reverse: 1 W**
d. **Case material: Aluminum alloy black paint**
e. **Operation temperature: -55°C to +85°C**
f. **RoHS Compliant**

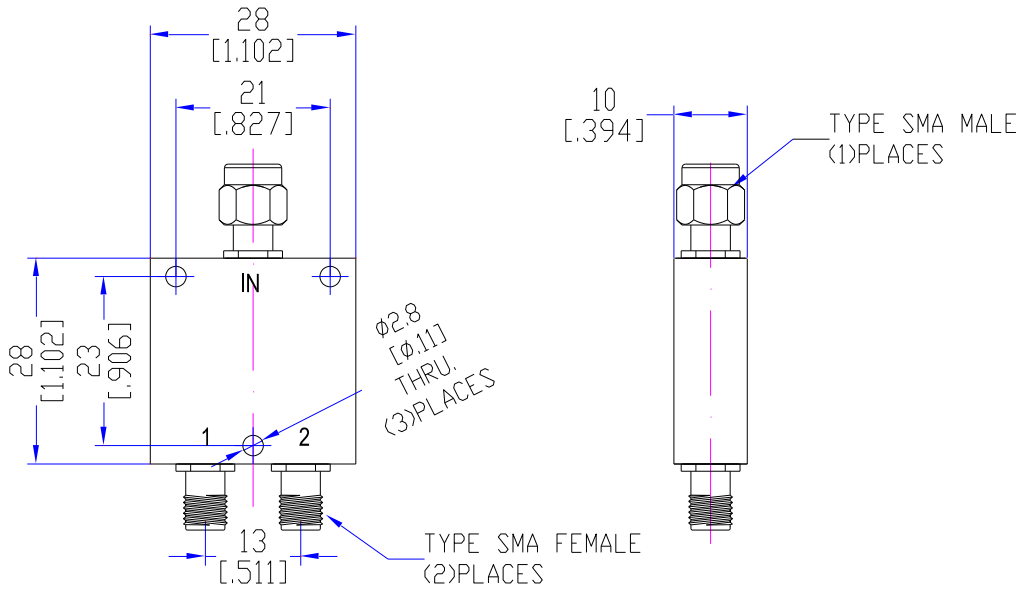

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 5/26/23