



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD2.4-40.292f

2-Way, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
4–40GHz	0.3dB max	+/-4° max	1.6:1 max	1.8dB typ	18dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: 2.92mm female 3 places, SS/P
- Power: Forward 20W CW Reverse 0.2W CW
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +125°C deg

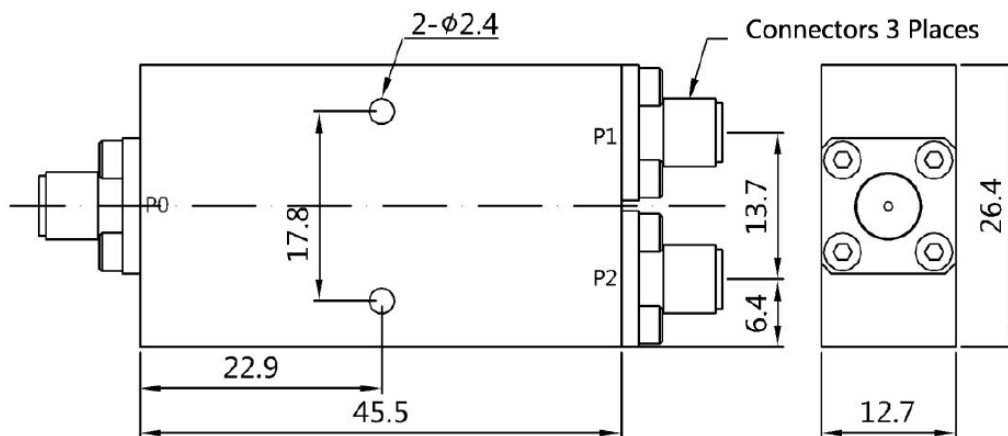

Note: Unit: mm, Unless otherwise specified, .Outline drawing +/-0.2mm; Hole +/-0.1mm

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com