1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider/Splitters

Model RMPD2-4000SF 2-way Power Divider SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	VSWR	Amplitude Unbalance
2000-4000MHz	0.3dB max	20dB min	2° max	1.3:1 max	0.3 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female (3 places)
c. Power: input: ≤ 15 W
d. Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
e. Operation temperature: -35C to +80C deg

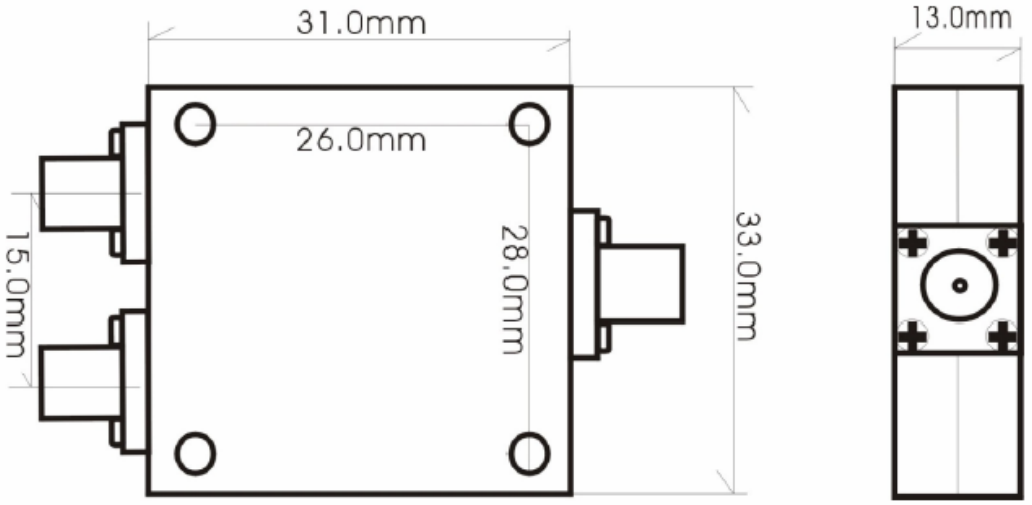

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05