94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.50-18000Sf 2-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.05-18GHz	0.3dB max	+/-5° max	1.60:1 typ*	1.6dB max	13dB typ*

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 3 places**
c. **Power: 5W forward, 1W reverse**
d. **Case material: Aluminum alloy w/black paint finish**
e. **Low band Spec 50-400MHz: VSWR = 2.2:1 Isolation 3dB min**
f. **Operation temperature: -55°C to +85°C**

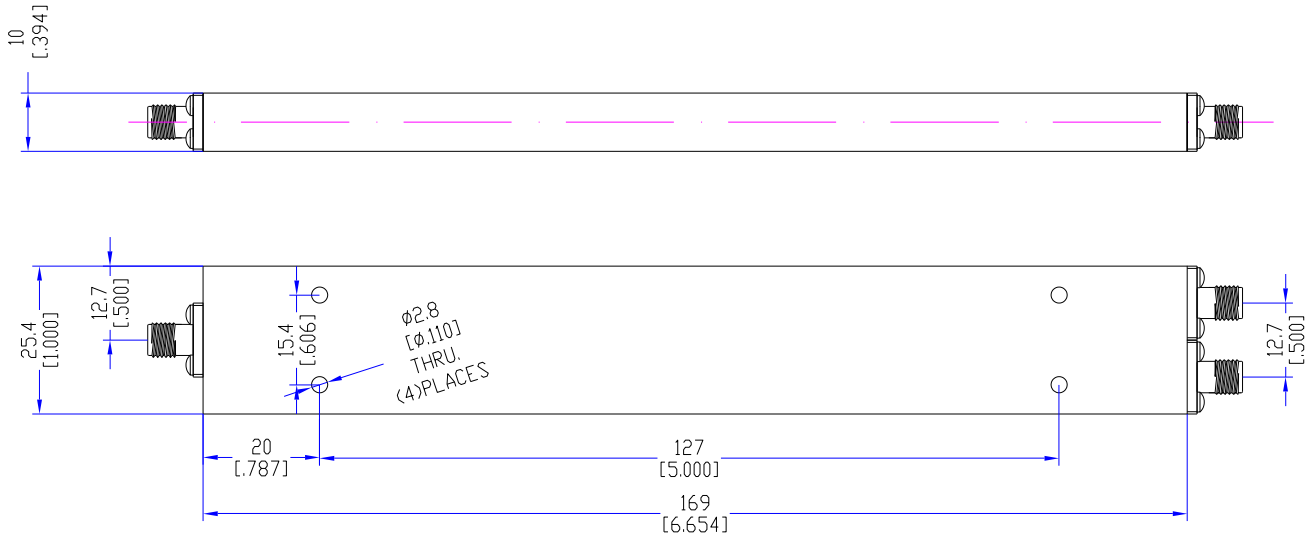

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com