



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider

Model RMPD2.500-3000Sf


2-Way, 0° SMA female

| Frequency   | Amplitude Unbalance | Phase Unbalance | VSWR      | Insertion Loss | Isolation |
|-------------|---------------------|-----------------|-----------|----------------|-----------|
| 0.5 – 3 GHz | 0.2dB max           | +/-2° max       | 1.3:1 max | 0.6dB max      | 18dB min  |

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA or N female 3 places
- Power: Forward 20 W Reverse: 1 W
- Case material: Aluminum alloy w/iridite finish
- Operation temperature: -55C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

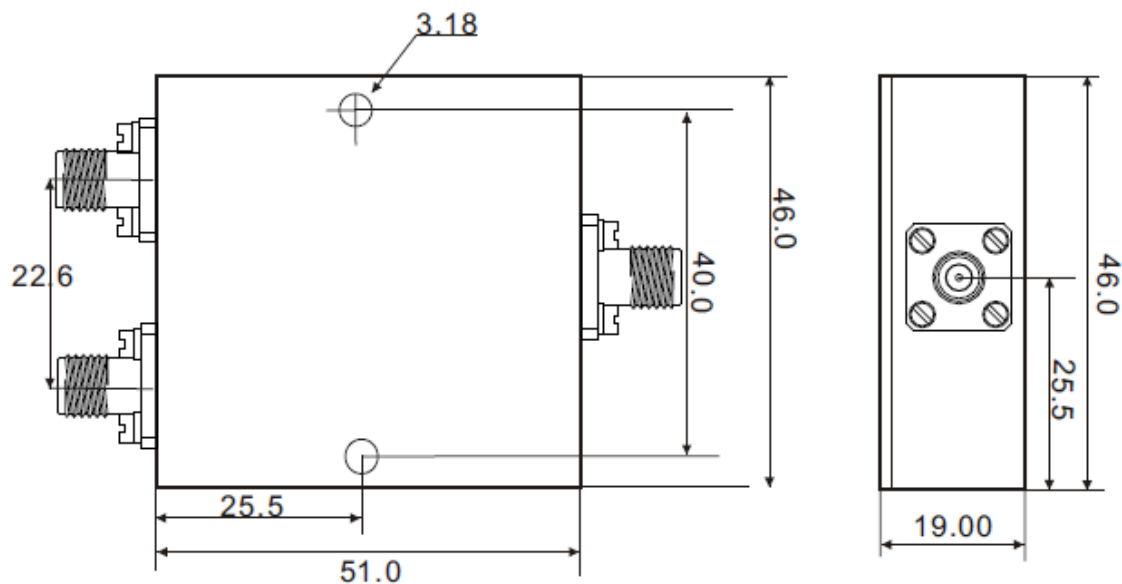

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)