



94 Jackson Road Suite 110 Devens, MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.500-4000Sf


2-Way Power Divider SMA Female

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance		
	max	min	typ/max	Phase °		Amp (dB)
0.5 – 4	0.5	20	1.3:1	3		0.2

Notes:

- Input and output impedance: 50 Ohms
- Connectors: SMA Female 3 places
- Power Handling: ≤ 25 Watt max Input ≤ 1.0 Watt Output
- Housing Material: Aluminum Alloy with black paint
- Operation temperature: -35°C to $+80^{\circ}\text{C}$ deg

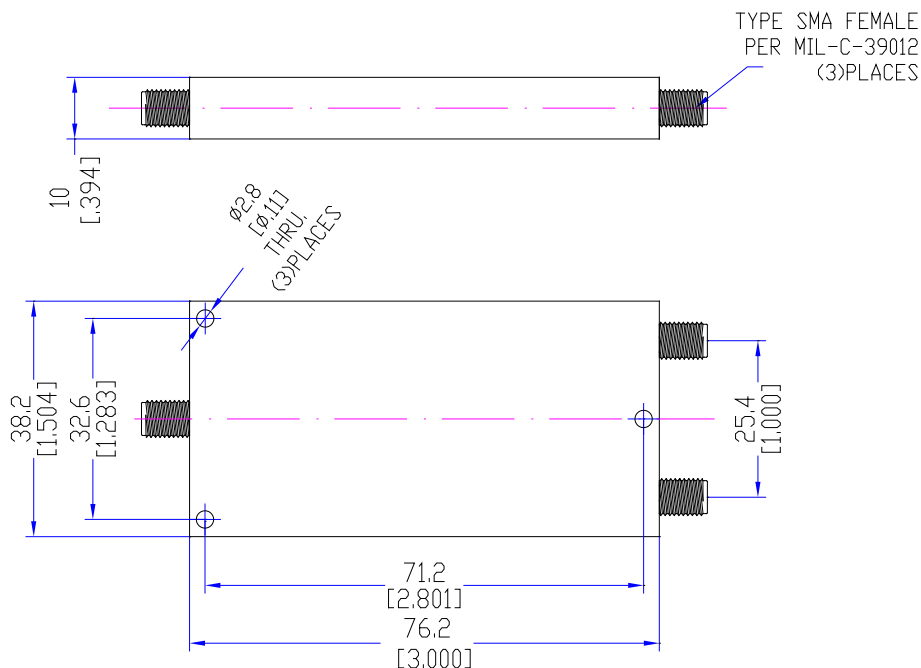

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com