



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD2.500-6000Nfa

2-Way, 0° N female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5 – 6 GHz	0.6dB max	+/-4° max	1.60:1 max	1.5dB max	18dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places
- Power: Forward 35 W Reverse: 1 W
- Case material: Aluminum alloy w/clear iridite finish
- Operation temperature: -35C to +85C deg

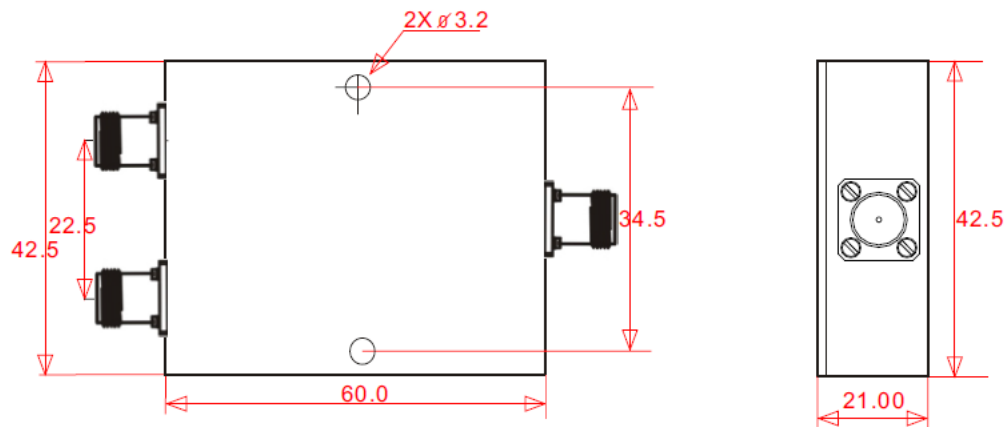

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com