94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD2.500-6000Nfb 2-Way, 0º N female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 0.5 – 6 GHz | 0.6dB max | +/-4º max | 1.60:1 max | 1.5dB max | 18dB min |

**Notes:**

a. Input and output impedance: 50Ω
b. Connector: N female 3 places
c. Power: Forward 35 W Reverse: 1W
d. Case material: Aluminum alloy w/clear iridite finish
e. Operation temperature: -35°C to +85°C

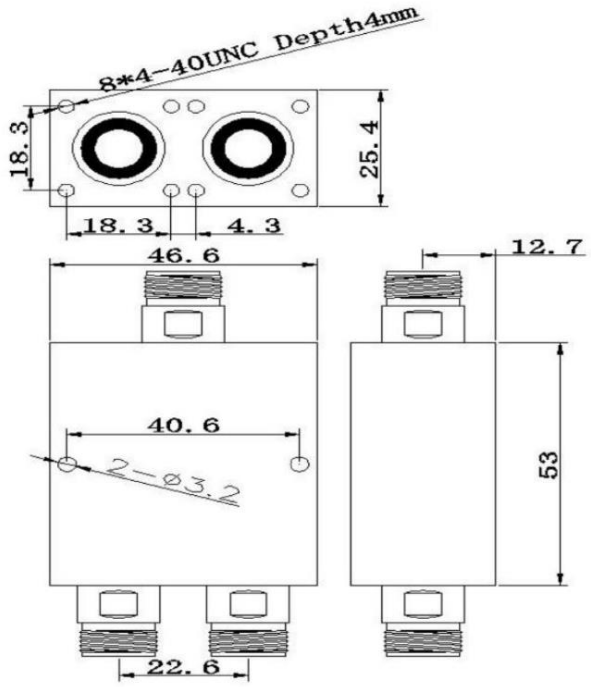


*Dimensions in mm. All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 2/18/21