94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.500-8000Sf 2-Way, Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5 – 8GHz	0.3dB max	+/-3º max	1.4:1 max	0.9dB max	15dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 3 places**
c. **Power: Forward 35 W CW Reverse 1W CW**
d. **Case material: Aluminum alloy w/clear iridite**
e. **Operation temperature: -55°C to +85°C**

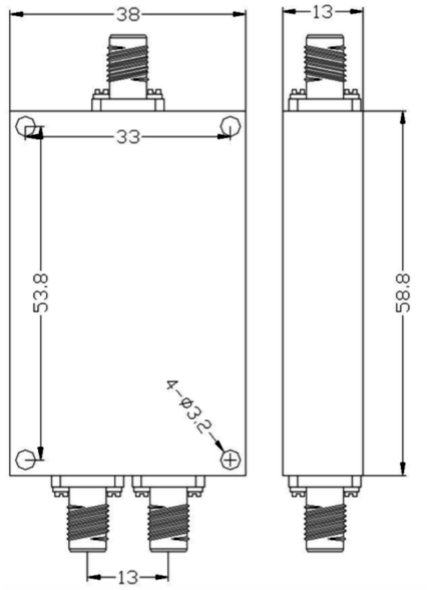

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com