94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.6-30.292f — 2-Way, Ultra Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
6–30GHz	0.5dB max	+/-5° max	1.6:1 max	1.4dB typ	16dB min

Notes:

a. Input and output impedance: 50 Ω
b. Connector: 2.92mm female 3 places, SS/P
c. Power: Forward 10W CW Reverse 1W CW
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -55°C to +125°C

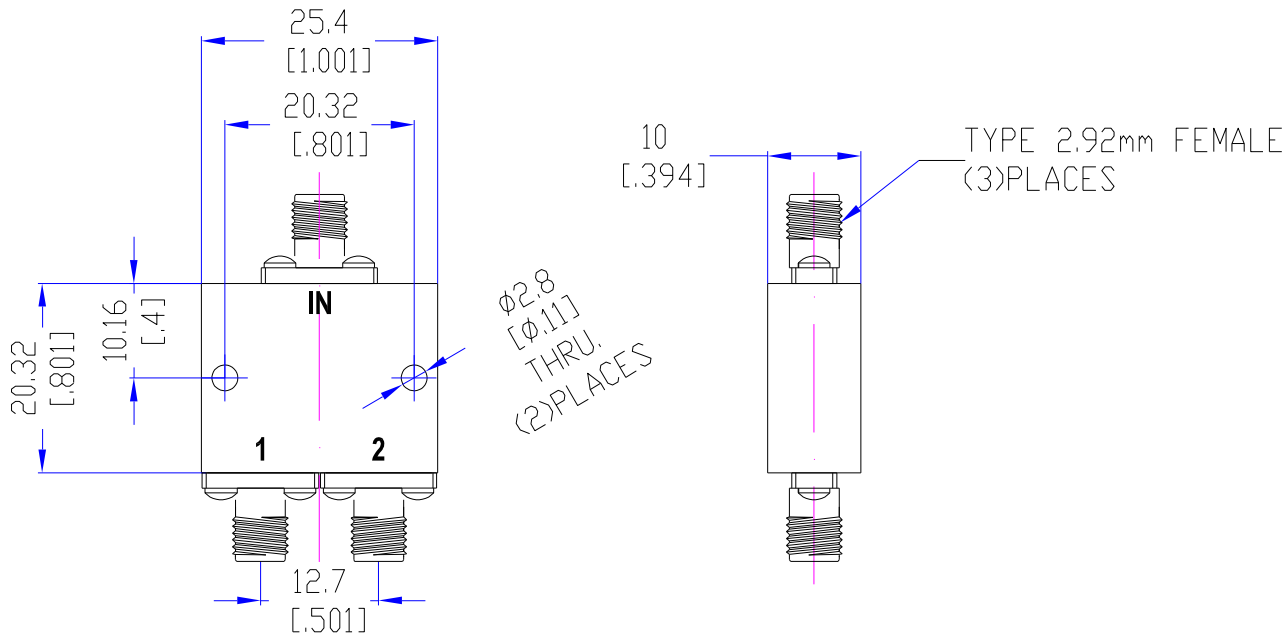

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com