94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.6000-18000Sf 2-Way Power Divider SMA Female

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance	
	max	min	max	Phase º	Amp (dB)
6 – 18	0.7	18	1.4:1	5	0.3

Notes:

a. Input and output impedance: 50 Ω
b. Connectors: SMA Female 3 places
c. Power Handling: ≤ 30 Watt max Input
d. Housing Material: Aluminum Alloy with black paint
e. Operation temperature: -55 ºC to +85ºC

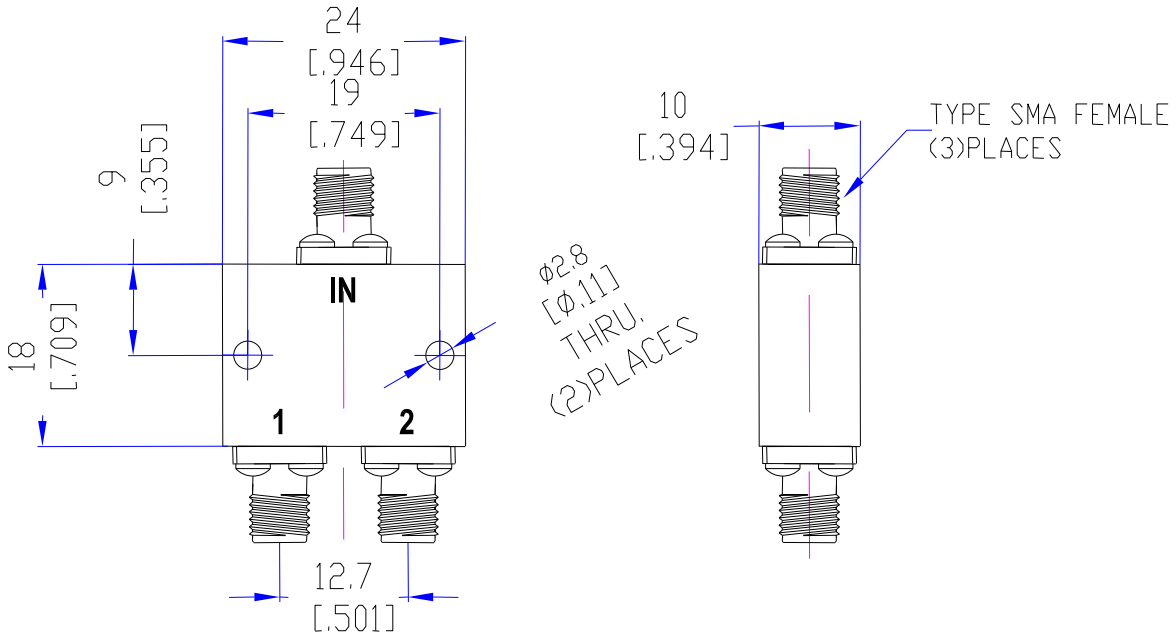

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com