94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.6400-7100Sfnc — 2-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
6.4 – 7.1GHz	0.2dB max	+/-2º max	1.30:1 max	0.5dB max	16dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 3 places
c. Power: 2W max non-coherent signals
d. Material: Aluminum alloy w/black epoxy resin paint
e. Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

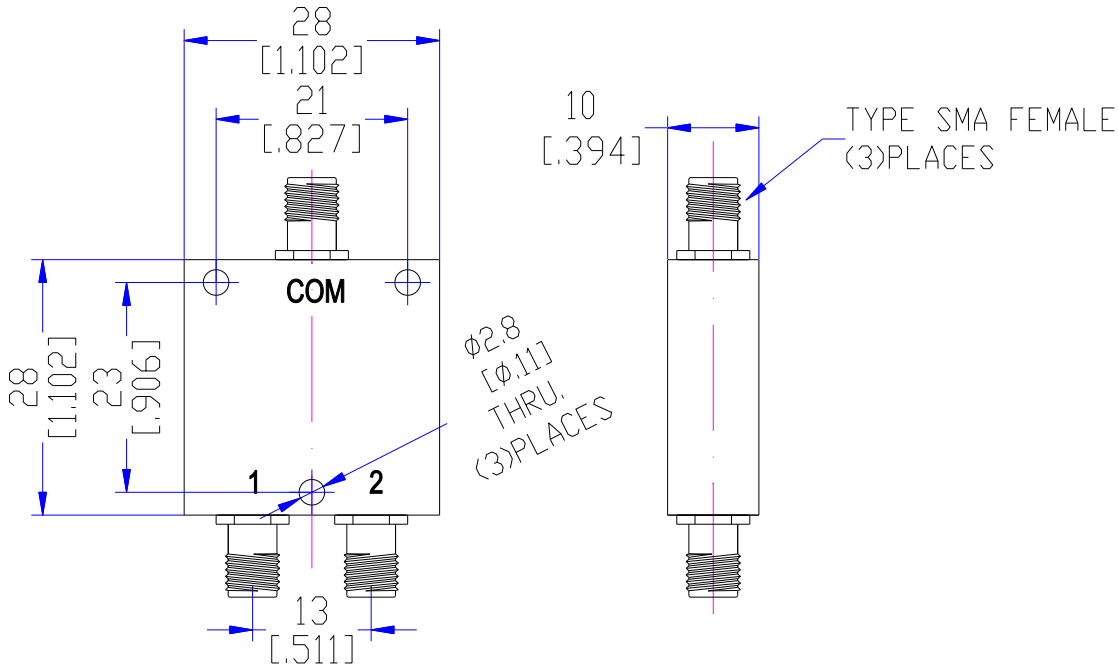

All specifications are subject to change. All tolerances +/-0.2mm.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 10/9/25