1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider/Splitters

Model RMPD2-6700Sf — 2-way Power Divider SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	Return Loss	Amplitude Unbalance
6700MHz	0.5dB max	18dB min	5° max	16dB max	0.5 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female (3 places)
c. Forward Power: ≤ 15 W
d. Case material: Aluminum alloy with Nickel-plating
e. Operation temperature: -35C to +80C deg

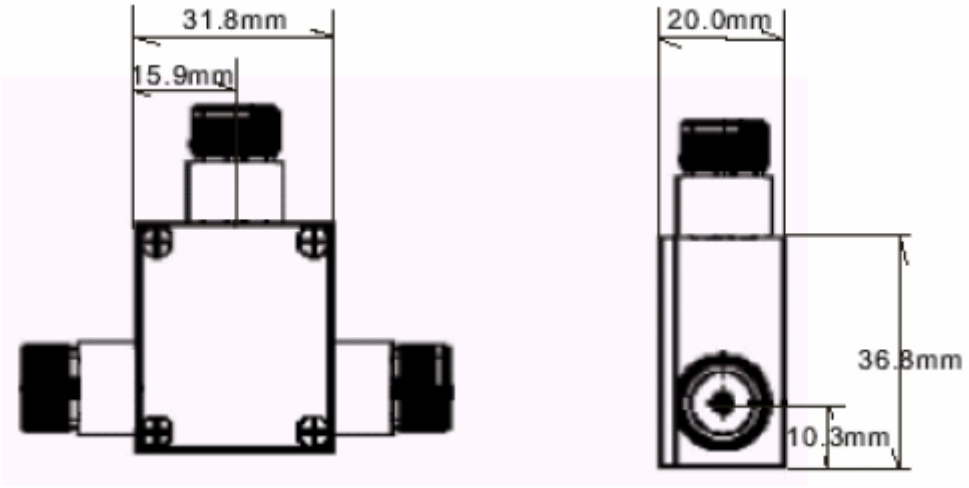

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05