94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD2.700-2700Nf 2-Way, 0º N female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
700–2700MHz	0.2dB max	+/-2º max	1.3:1 max	0.4dB max	22dB min

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: N female 3 places
c. Power: Forward 50 W
d. Case material: Aluminum alloy with clear iridite plate
e. Operation temperature: -35C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA 3050B & AAS, EPA 3060A & EPA 7196, EPA 3052 & AAS, EN1122: 2001 & AAS, EPA 3540C & GC-MS

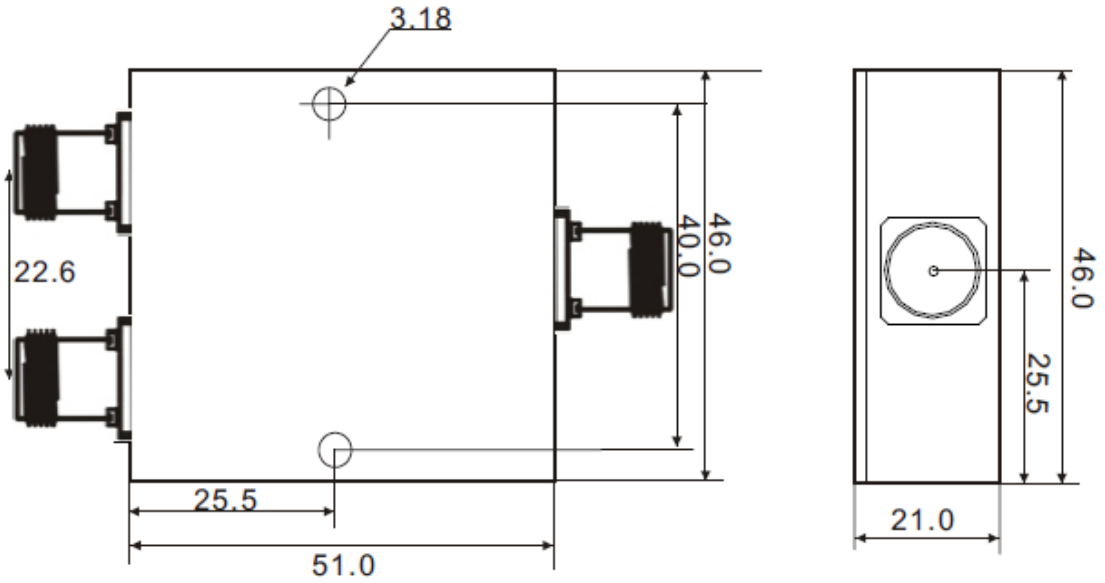

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com