



94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers

Model RMPD24-500-6000SMANff

24 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.5–6GHz	6.5dB max	16dB min	2.0:1 max	15° max	1.2 dB max

Notes:

- Input and output impedance: 50Ω
- Connector: In - N female, Out - SMA female (thread-in style – no flange)
- Forward Power: $\leq 30\text{W}$, Reverse: $\leq 3\text{W}$
- Case material: Aluminum alloy w/clear iridite
- Operation temperature: -35°C to +85°C

SEE OUTLINE ON PAGE 2


Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON RD, STE 100, DEVENS, MA 01434

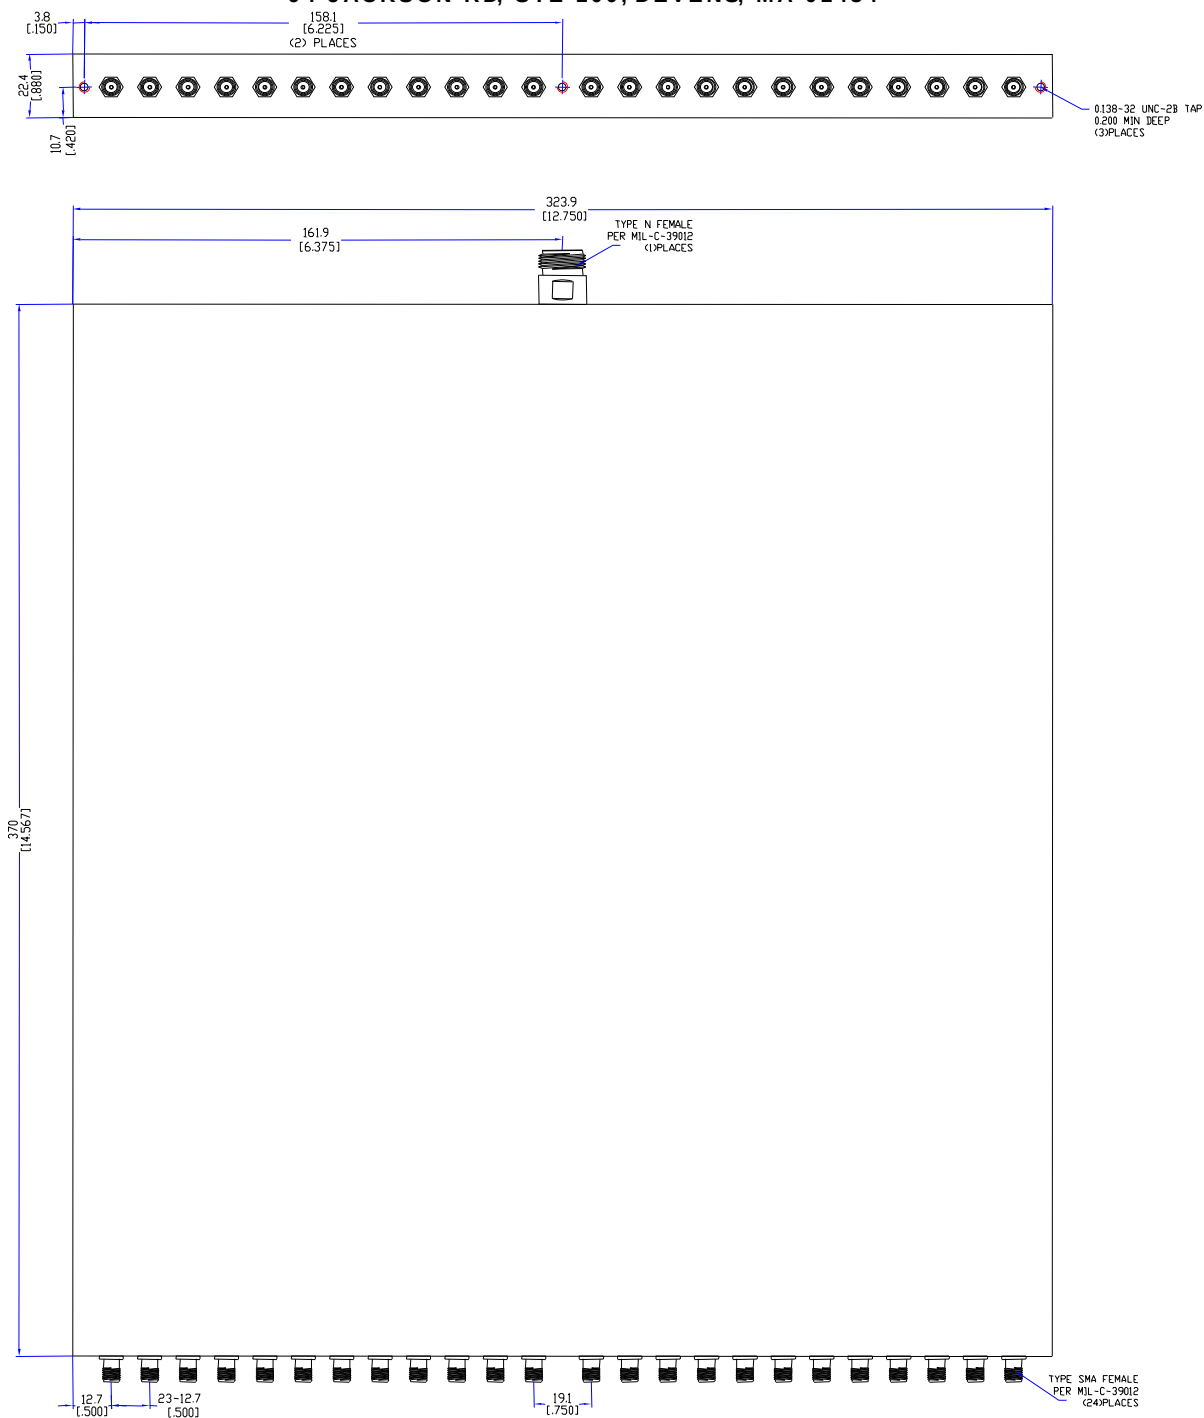

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 3/31/16