94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers

Model RMPD24-600-2400SMANffe — 24 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.6–2.4GHz	0.8typ/3.0dB max	18dB min	1.7:1 typ	14° max	0.9 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: In - N female, Out - SMA female (thread-in style – no flange)
c. Forward Power: ≤ 30W, Reverse: ≤ 3W
d. Case material: Aluminum alloy
e. Operation temperature: -35C to +85C deg

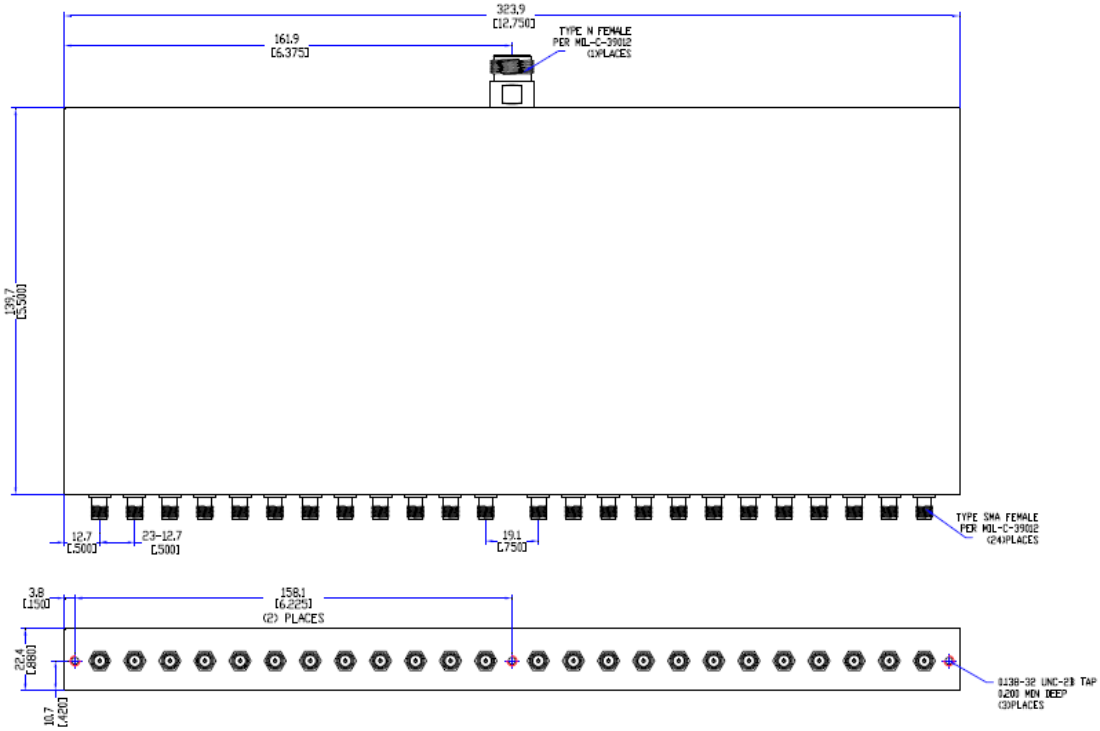

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com