94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers

Model RMPD24-600-2400SMANff 24 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.6–2.4GHz	0.8typ/3.0dB max	19dB min	1.4:1 typ	12° max	0.8 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: In - N female, Out - SMA female
c. Forward Power: ≤ 25W, Reverse: ≤ 1W
d. Case material: Aluminum alloy
e. Operation temperature: -35C to +85C deg

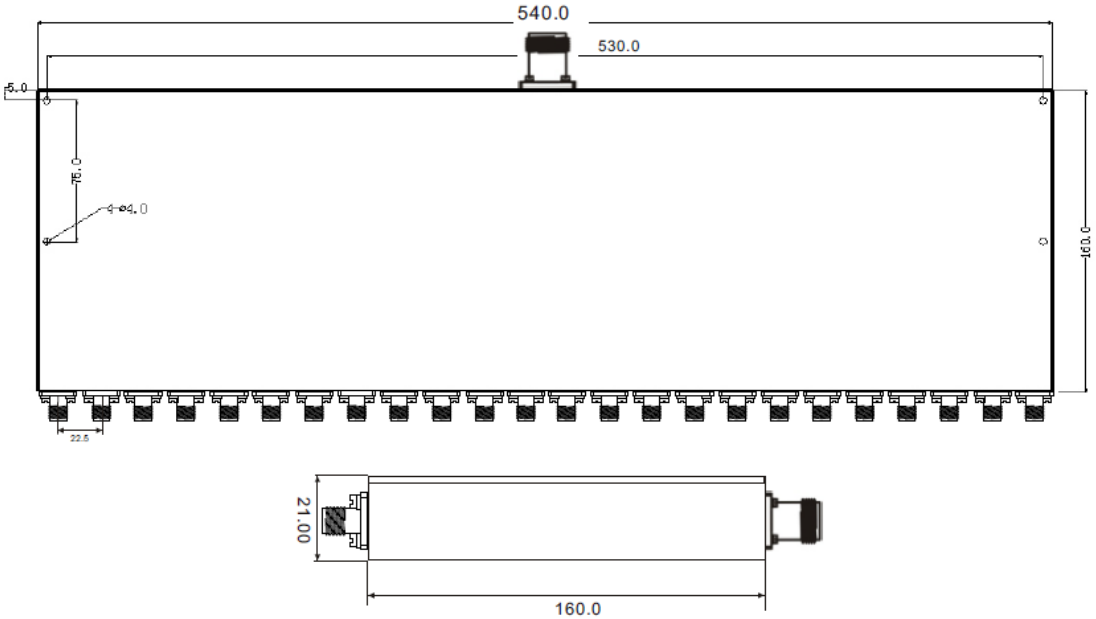

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 3/9/12