



94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers


Model RMPD24-600-3000Sf

24 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.6–3GHz	1.2typ/2.8dB max	18dB min	1.5:1 typ	10° max	1.0 dB max

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female
- Forward Power: $\leq 25W$, Reverse: $\leq 3W$
- Case material: Aluminum alloy
- Operation temperature: -35°C to +85°C

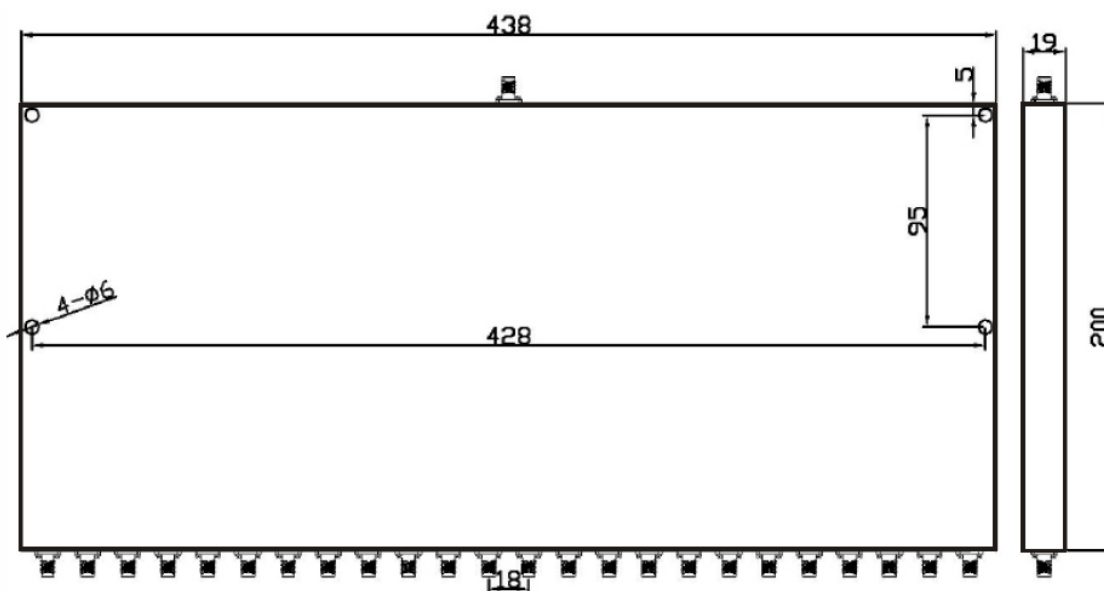

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com