94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD3.05-18Sfa — 3-Way, Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5–18GHz	0.5dB max	+/-5° max	1.6:1 max	10.0dB max	17dB min

Notes:

a. Input and output impedance: 50 Ω
b. Connector: SMA female 4 places, SS/P
c. Power: Forward 30W CW Reverse 1W CW
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -55°C to +85°C

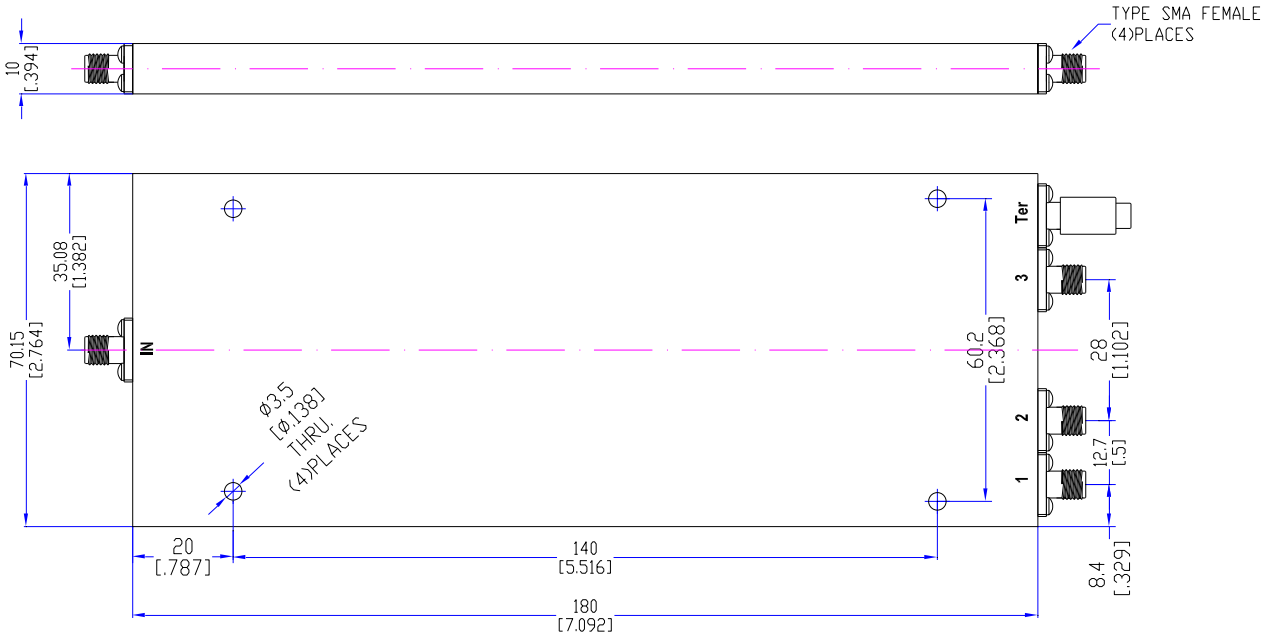

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com