



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD3.500-6000Sf


3-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
500-6000MHz	1.0dB max	+/-10° max	1.60:1max	2.1dBmax	18dB min

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 4 places (male available on request)
- Power: Forward 35W CW Reverse: 2W
- Case material: Aluminum alloy w/black paint
- Operation temperature: -35°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

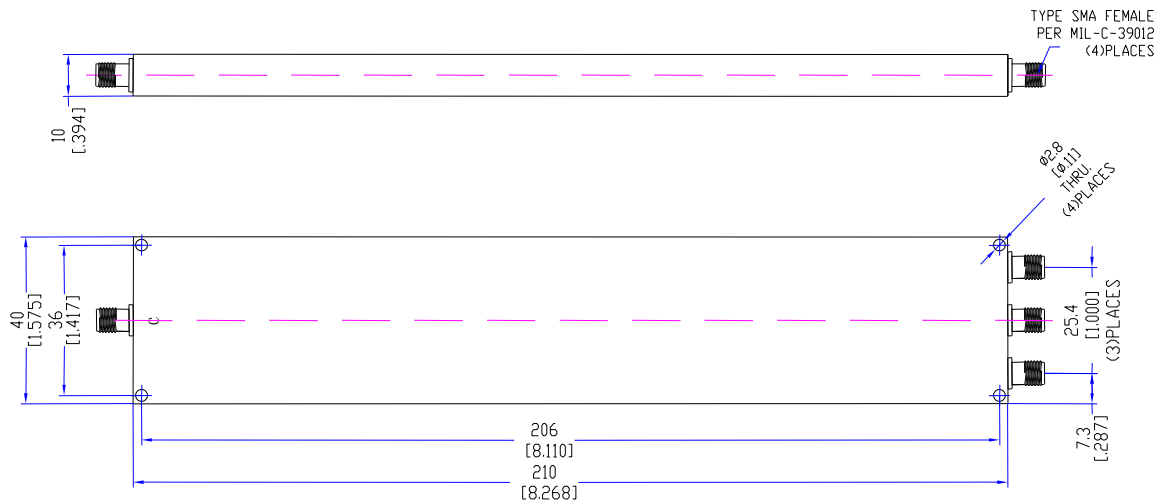

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com