94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD3.9000-9500Sf 3-Way, 0º, SMA female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 9 – 9.5GHz | 0.4dB max | +/- 5º max | 1.50:1 max | 0.8dB max | 18dB min |

**Notes:**

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 4 places**
c. **Power: Forward 30W CW, Reverse 1W CW**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -55°C to +85°C**

*Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:*
***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

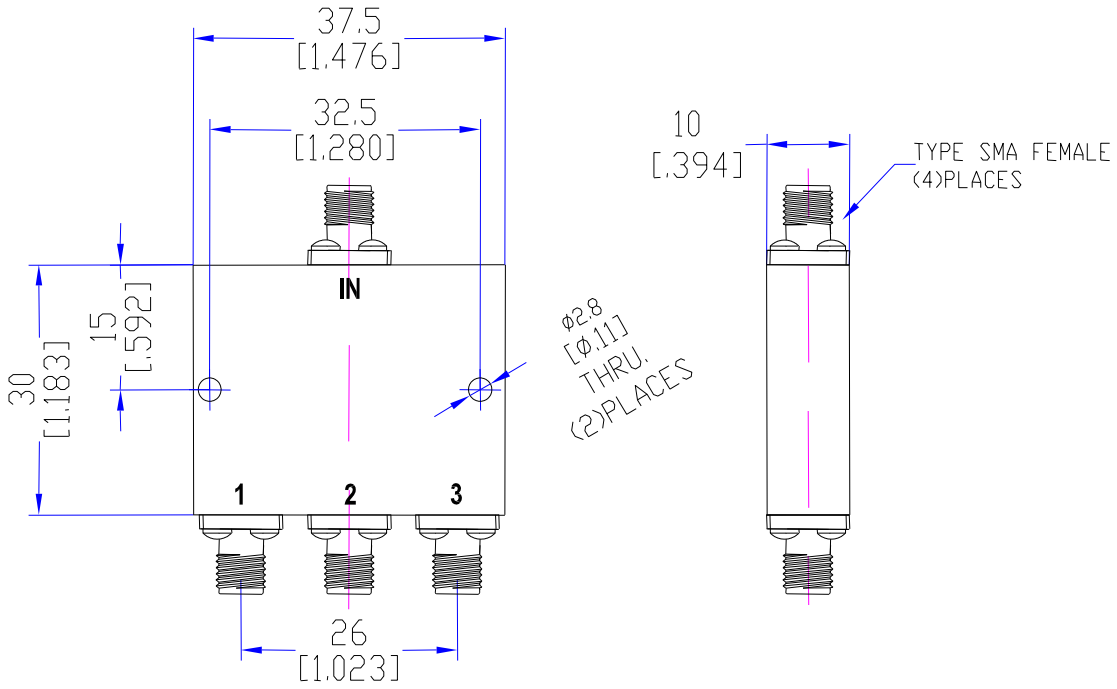


*Dimensions in mm(inches). All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com