



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD32.2500-2900.Smf


32-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
2.5-2.9GHz	0.8dB max	+/-7° max	1.60:1max	2dB max	20dB min

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA male 1 place/SMA female 32 places
- Power: Forward: 30W CW @ 1.20:1 load VSWR Reverse: 4 W
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

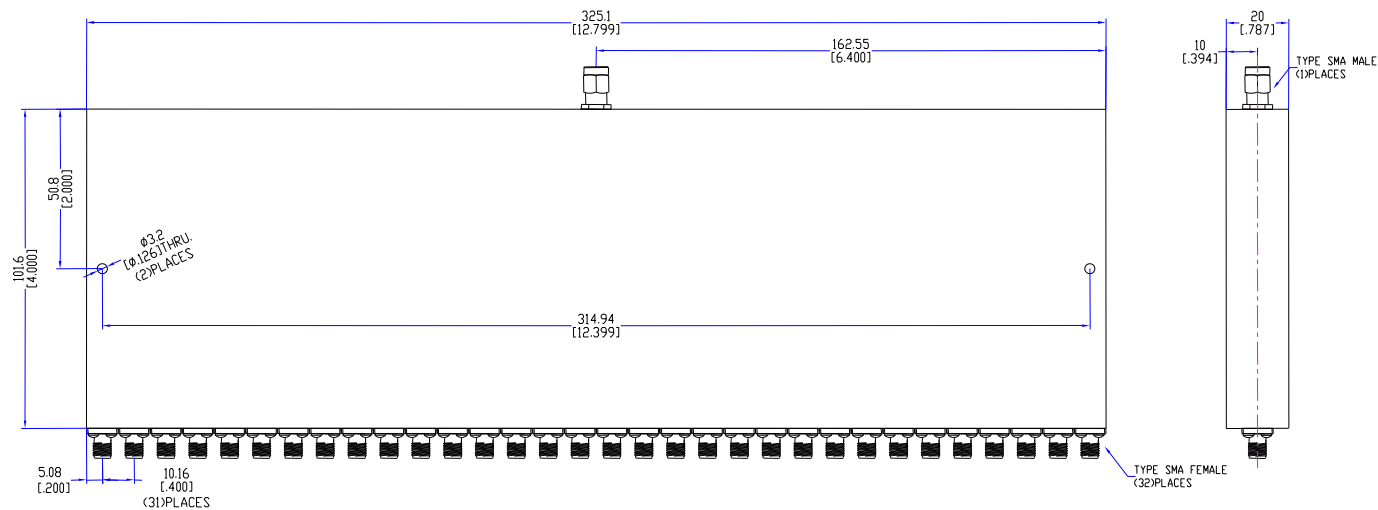

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com