94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD32.500-6000Sf 32-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5-6GHz	1.0dB max	+/-12º max	1.85:1max	4.4dB max	17dB min

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 32 places**
c. **Power: Forward: 35W CW @ 1.20:1 load VSWR Reverse: 1 W**
d. **Case material: Aluminum alloy w/clear iridite**
e. **Operation temperature: -30°C to +85°C**

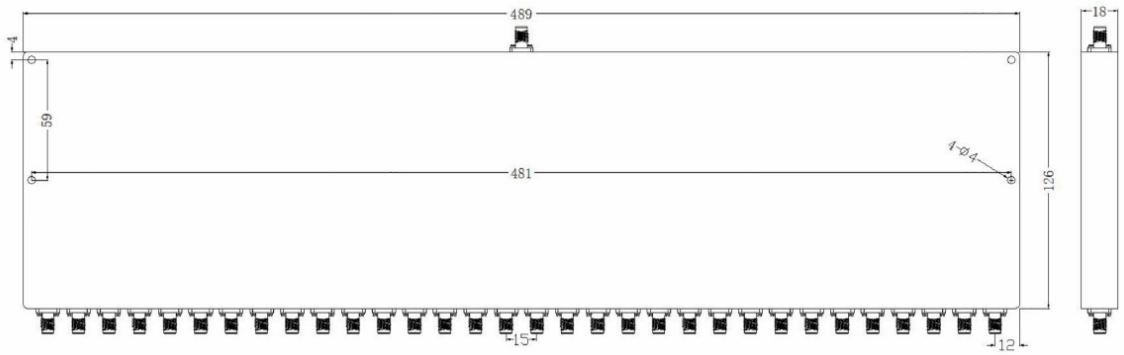

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com