



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD4.1-100Sf

4-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
1 - 100 MHz	0.6dB max	+/-6° max	1.5:1 max	0.8dB max	22dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 5 places
- Power: Forward 30 W
- Case material: Aluminum alloy with golden iridite plate
- Operation temperature: -55C to +85C deg

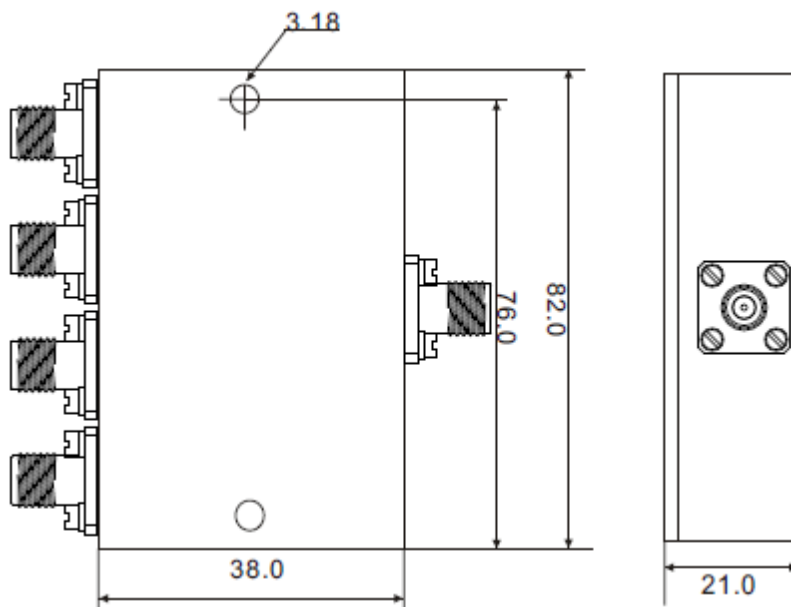

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com