94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD4.1-50.24f 4-Way, 2.4mm female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 1 – 50GHz | 1.5dB max | +/- 15º max | 1.70:1 max | 10.5dB max | 13dB typ |

**Notes:**

a. **Input and output impedance: 50Ω**
b. **Connector: 2.4mm female 5 places stainless/passivate**
c. **Power: Forward 10W CW Reverse: 1 W**
d. **Case material: Aluminum alloy w/black paint finish**
e. **Operation temperature: -55°C to +85°C**

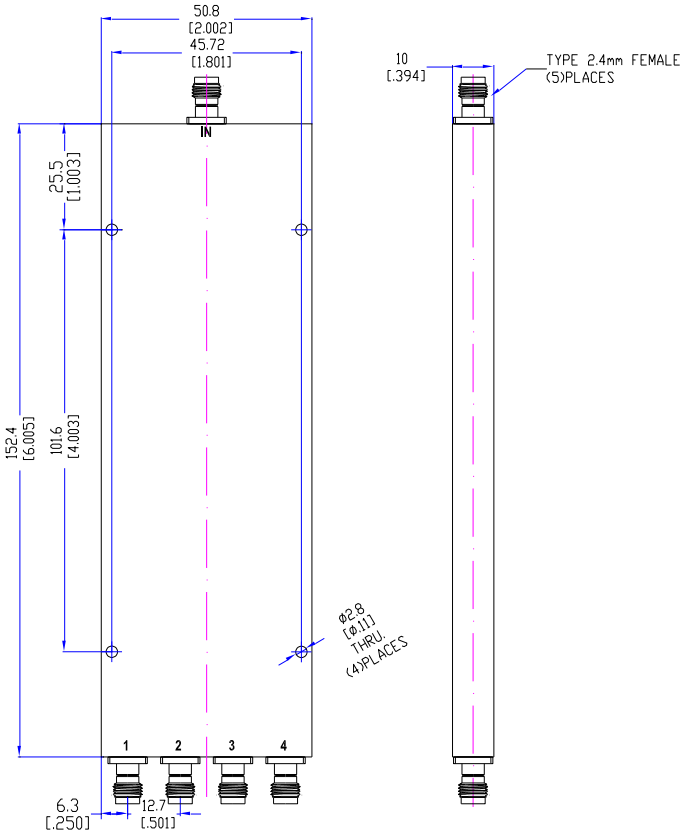


*Dimensions in mm (tol = 0.2mm). All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 08/12/22