



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.18-40.292f


4-Way, 0° 2.92mm female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
18 – 40GHz	0.8dB max	+/- 8° max	1.70:1 max	1.3dB max	16dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: 2.92mm female 5 places (male available on request)
- Power: Forward 30 W CW Reverse: 1 W
- Case material: Aluminum alloy w/clear iridite finish
- Operation temperature: -35°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

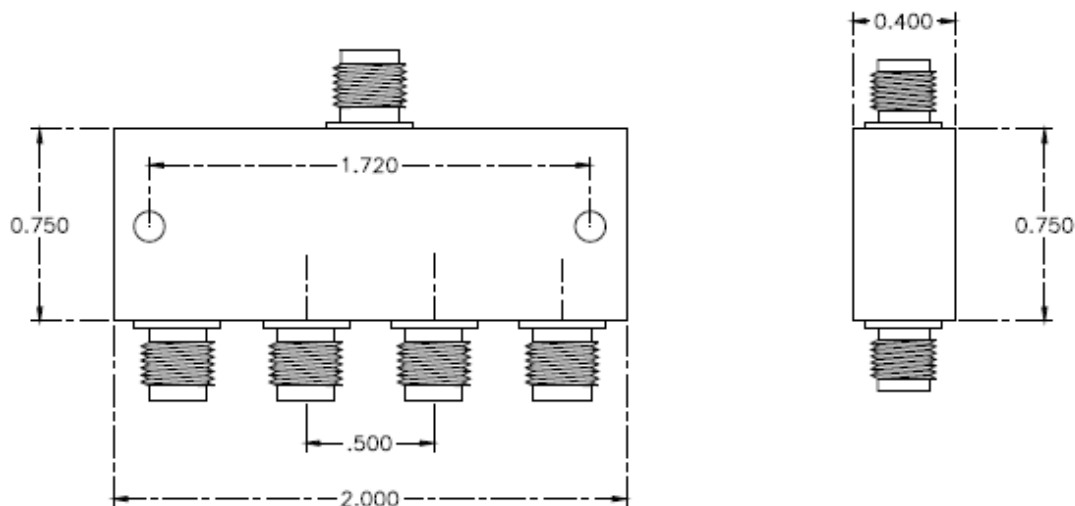

Dimensions in inches. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com