94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.2-18Sfb — 4-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
2 - 18GHz	0.5dB max	+/- 12º max	1.7:1 max	1.8dB max	17dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 5 places stainless/passivate**
c. **Power: Forward 10 W CW Reverse: 1 W**
d. **Case material: Aluminum alloy w/black paint finish**
e. **Operation temperature: -55°C to +85°C**

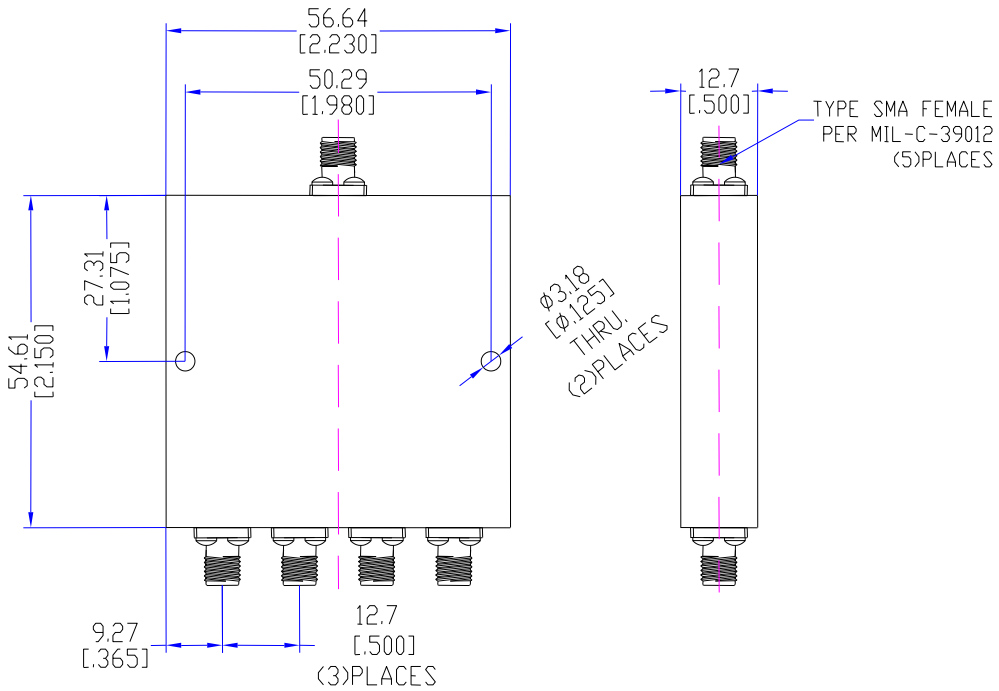

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com