94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.2-18Sfc — 4-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
2 - 18GHz	0.5dB max	+/- 6º max	1.70:1 max	1.5dB max	16dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 5 places stainless/passivate
c. Power: Forward 10 W CW Reverse: 1 W
d. Case material: Aluminum alloy w/black paint finish
e. Operation temperature: -55°C to +85°C

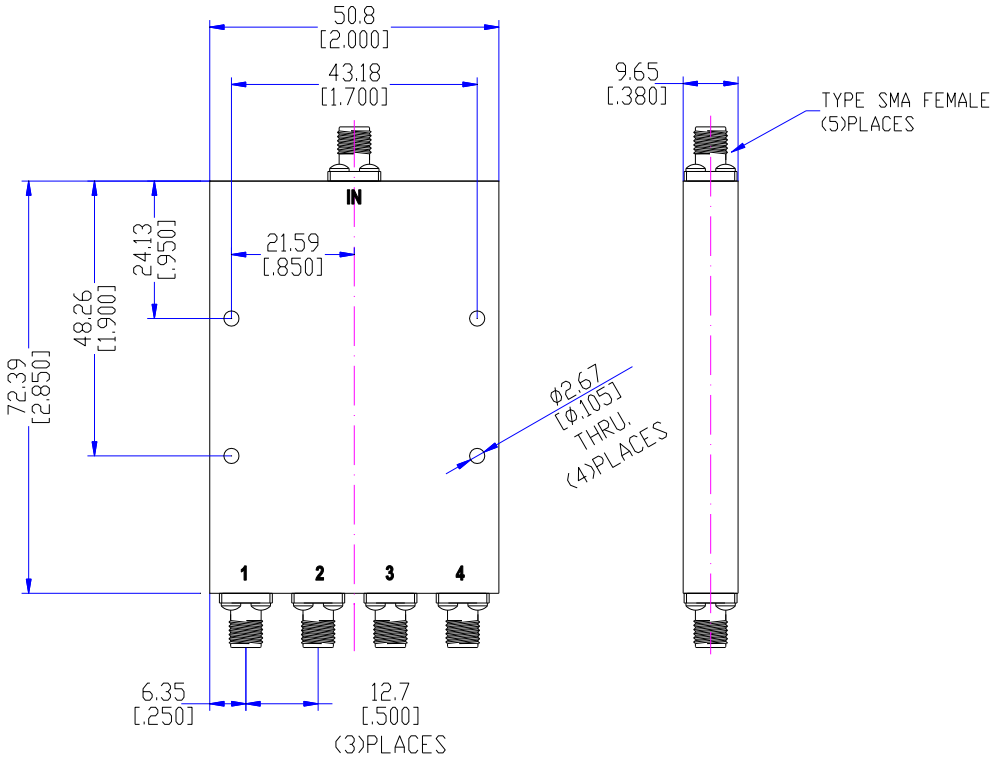

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com