1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider / Splitters

Model RMPD4-2000SF 4 way Power Divider SMA female

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
1000-2000MHz	0.6dB max	25dB min	1.3:1typ	5° max	0.5 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female
c. Power: 15w forward, ≤ 1 W reverse
d. Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
e. Operation temperature: -35C to +85C deg

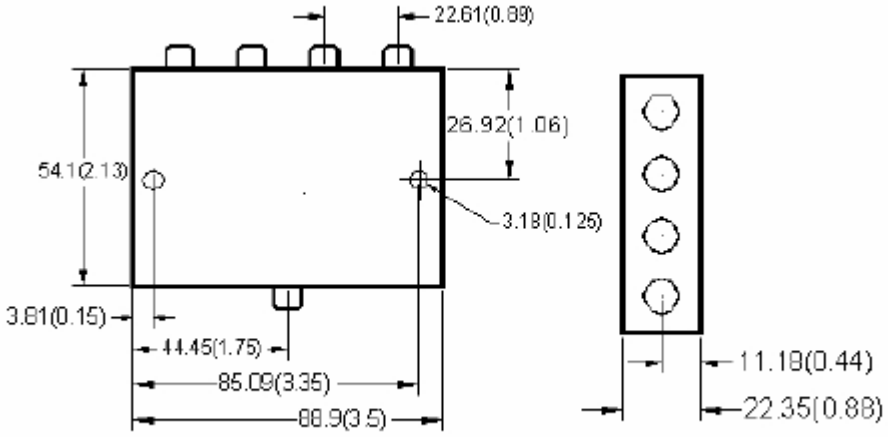

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05